




				REV.	ECN NO.	DATE	SIGN	DESCRIPTION
				D	C191279	2019/07/18	JC Chen	Modify The Gasket Color
				E	C231273	2023/10/04	Ruru	△E X2
				F	C240570	2024/05/28	Ruru	△F X1




O-Ring




Connector




Lock Nut




Gasket




Clamp Ring




Seal




Sealing Nut



Conn.
Pin Assignments
Front View




△F

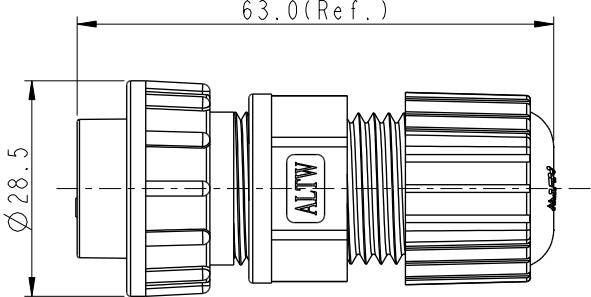

63.0(Ref.)
△E
△D
△C

UNIT:mm



TOLERANCE

.X ±0.25

.XX ±0.1

.XXX ±0.05

ANGLES ±1°

TITLE

O CERES, D-20A+2A, 08P, CABLE W/O SR
F, F PWR+M SIG, FI SOLDER, 2LOCK △E

SCALE

1:1

SIZE

A4

SHEET

1

OF

1

REV.

F

WC-REV.

B.3

QC

: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DCU-08BFDA-LL7001

DWG NO

DCU-08BFDA-LL7001

CUSTOMER

ALTW

DRAWN BY

Ruru

CHECKED BY

Rita

APPROVED BY

Fred

DATE

2024-05-28

DATE

2024-05-28

DATE

2024-05-28

△E Note:

* Important Dimension To Check

* Waterproof Rate: IP67, Mated

* O-Ring: Rubber, Gray

* Connector: Thermoplastic, Black

* Pin: Copper Alloy, Gold Plated

* Lock Nut: Thermoplastic, Black

* Gasket: Rubber, Black

* Clamp Ring: Thermoplastic, Black

* Seal: Rubber, Gray

* Sealing Nut: Thermoplastic, Black



* Cable OD Max: Ø9.5~10.8mm

* One set unassembled in one pe bag



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C191279	2019/07/18	JC Chen	Modify The Gasket Color
E	C231273	2023/10/04	Ruru	△E X2
F	C240570	2024/05/28	Ruru	△E X1

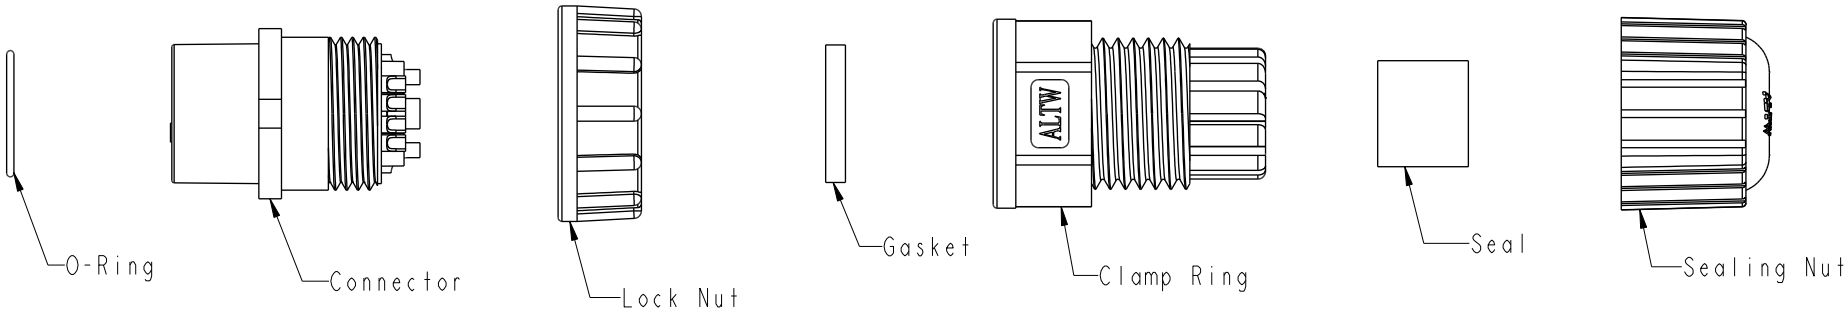

Conn.
Pin Assignments
Front View

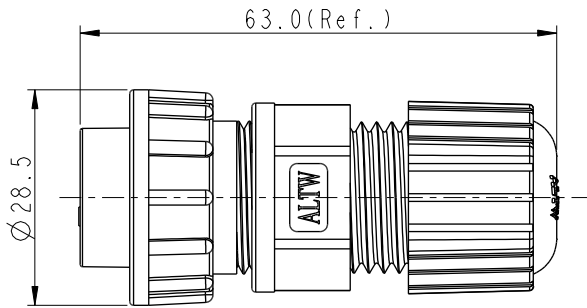

- △E Note:
- * (QC) Important Dimension To Check
 - * Waterproof Rate: IP67, Mated
 - * O-Ring: Rubber, Gray
 - * Connector: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Lock Nut: Thermoplastic, Black
 - △C * Gasket: Rubber, Black
 - * Clamp Ring: Thermoplastic, Black
 - △D * Seal: Rubber, Gray
 - * Sealing Nut: Thermoplastic, Black
 - △B * Cable OD Max: Ø9.5~10.8mm
 - * One set unassembled in one pe bag

UNIT:mm	TITLE O CERES, D-20A+2A, 08P, CABLE W/O SR F, F PWR+M SIG, FI SOLDER, 2LOCK △E				ITEM NO DCU-08BFDA-LL7001		DRAWN BY Ruru		DATE 2024-05-28	
	SCALE 1:1				DWG NO DCU-08BFDA-LL7001		CHECKED BY Rita		DATE 2024-05-28	
	REV. F				CUSTOMER ALTW		APPROVED BY Fred		DATE 2024-05-28	
	TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°				SIZE A4		SHEET 1 OF 1		WC-REV. B.3	

Amphenol LTW
安費諾亮泰企業股份有限公司