REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LENI350059	2013/05/06	Ruru	Modify Cable OD Max
D	LENI741284	2017/04/20	Vicky	Update Logo
E	C231273	2023/10/04	Ruru	△E X2

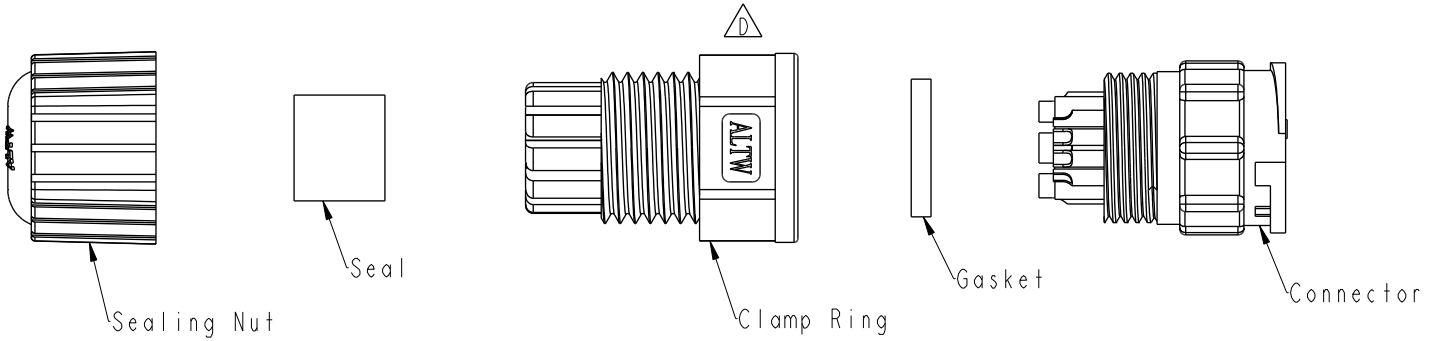

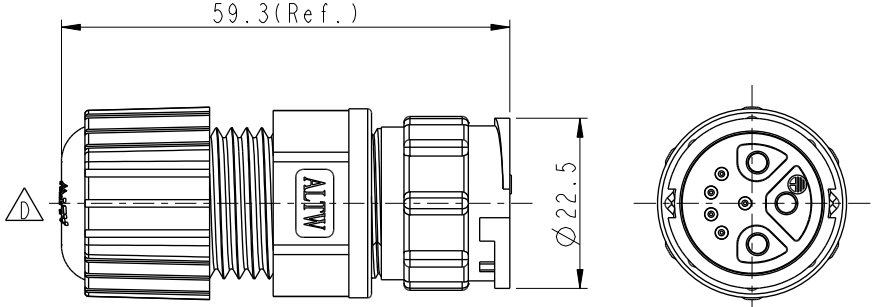



Conn.
Pin Assignments
Front View

△E Note:
* QC Important Dimension
* Waterproof Rate: IP67, Mated
* Connector: Thermoplastic, Black
* Pin: Copper Alloy, Gold Plated
△B * Gasket: Rubber, Black
* Clamp Ring: Thermoplastic, Black
* Seals: Rubber, Gray
* Sealing Nut: Thermoplastic, Black
△C * Cable OD Max: Ø9.5~Ø10.8mm
* One set unassembled in one pe bag

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: O CERES, D-20A+2A, 08P, CABLE W/O SR M, F PWR+M SIG, FI SOLDER, 2LOCK △E

SCALE: 1:1 | SIZE: A4 | SHEET: 1 OF 1

REV.: E | WC-REV.: C.3 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO: DCU-08BMDA-LL7001	DRAWN BY: Vicky	DATE: 2017-04-20
DWG NO: DCU-08BMDA-LL7001	CHECKED BY: Rita	DATE: 2017-04-20
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2017-04-20

WI0814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.