



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C220112	2022/01/18	Ruru	XI
D	C220230	2022/02/16	Ruru	XI
E	C231239	2023/09/21	Vicky	XI




Sealing Nut




Seal

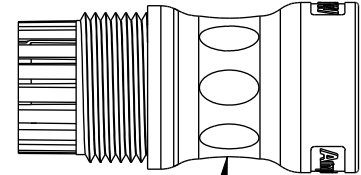

Clamp Ring



Connector


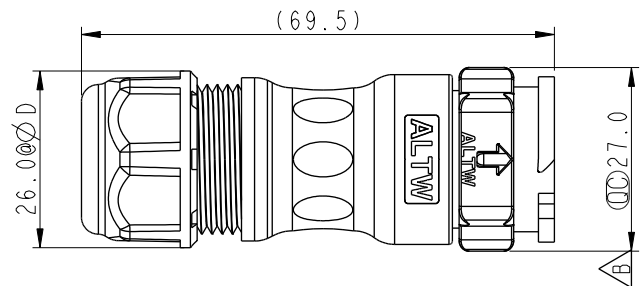


DD-XXBMM-QL8XP0

14-14 Pin


18-18 Pin

S: With Red Color Seal 1, Cable OD 8.0~10.0mm.
M: With Yellow Color Seal 2, Cable OD 10.0~12.0mm.
L: With Blue Color Seal 3, Cable OD 12.0~14.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

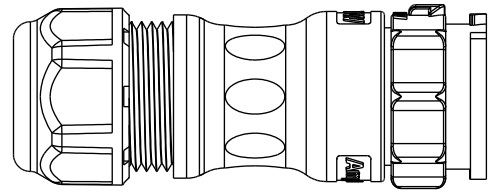


- Note:
- * Important Dimension
 - * Waterproof Rate: IP68, Mated
 - * IP68 : 1M Depth Of Water In 24hours
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seals: Rubber
 - * One set unassembled in one pe bag

Pin Assignments Front View



14 Pin



18 Pin

UNIT:mm		TITLE	XLOK, D-5A, CABLE W/O SR M, M, FI CRIMP, XLOK	
TOLERANCE	±0.5 mm	SCALE	1:1	SIZE A4
		REV.	E	WC-REV. .0
				Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2019-11-20
DWG NO	CHECKED BY	DATE
DD-XXBMM-QL8XP0	Rita	2019-11-20
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2019-11-20