
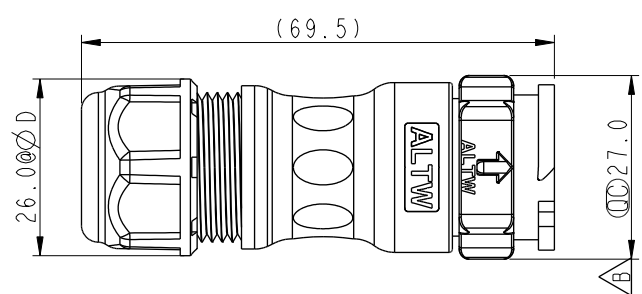


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C220112	2022/01/08	Ruru	△C XI
D	C220230	2022/02/16	Ruru	△D XI
E	C231239	2023/09/21	Vicky	△E XI

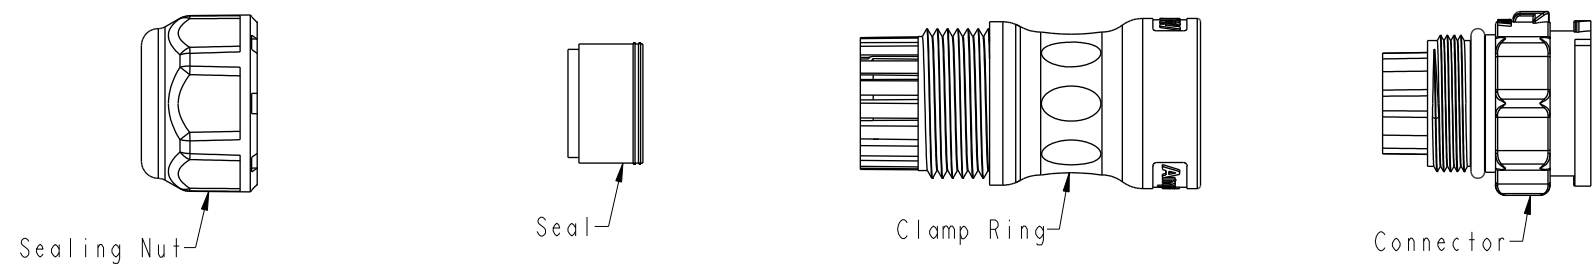


DD-XXBMM-QL8XN0

14-14 Pin  
18-18 Pin

△C △D


S: With Red Color Seal 1, Cable OD 8.0~10.0mm.  
M: With Yellow Color Seal 2, Cable OD 10.0~12.0mm.  
L: With Blue Color Seal 3, Cable OD 12.0~14.0mm.  
A: With Seal 1 & Seal 2 & Seal 3.

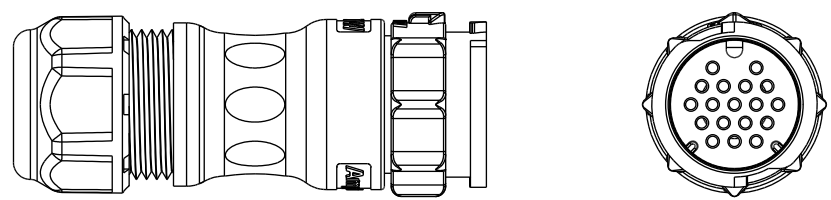

△B Note:

- \* ∅ Important Dimension
- \* Waterproof Rate: IP68, Mated  
IP68 : 1M Depth Of Water In 24hours
- \* Housing: Thermoplastic, Black
- \* Clamp Ring: Thermoplastic, Black
- \* Sealing Nut: Thermoplastic, Black
- \* Seals: Rubber

△E \* One set unassembled in one pe bag

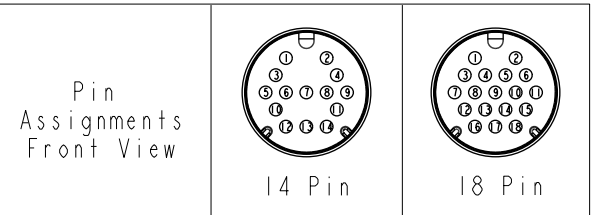

UNIT:mm		TITLE	XLOK, D-5A, CABLE W/O SR M, M, FI CRIMP, XLOK △B	
TOLERANCE	±0.5 mm	SCALE	1:1	SIZE A4
		REV.	E	WC-REV. .0
			∅∅: Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2019-11-20
DWG NO	CHECKED BY	DATE
DD-XXBMM-QL8XN0 △B	Rita	2019-11-20
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2019-11-20