



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1150097~100	2011/04/22	Ruru	Modify Nut View
C	C231178	2023/09/05	Vicky	△C X2
D	C231393	2023/11/02	Ruru	△D X3

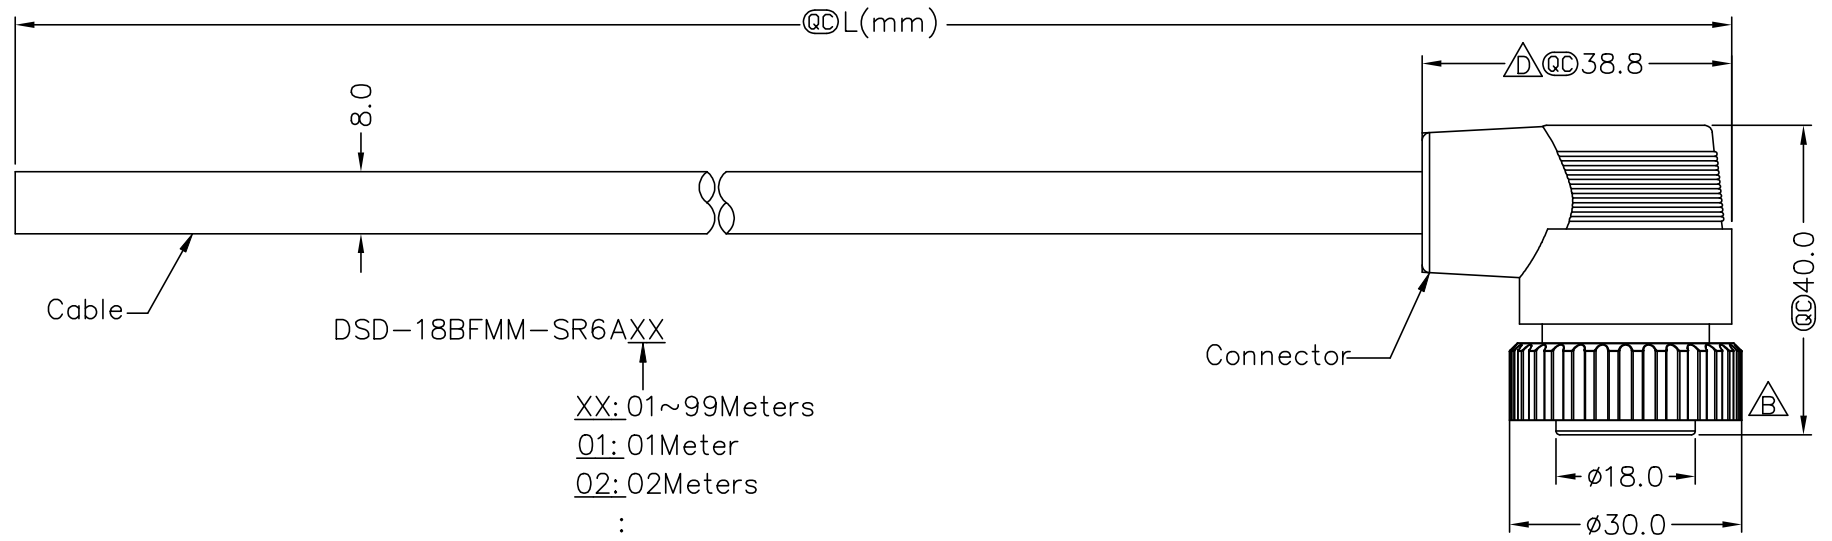

DSD-18BFMM-SR6AXX

XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 :
 99: 99Meters

Cable Length(L): 01~99Meters

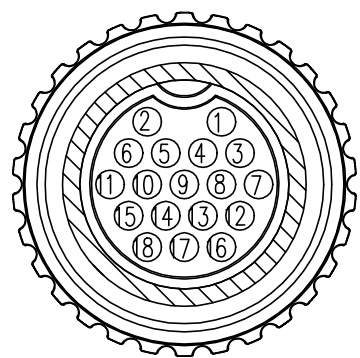

Pin Assignments
Front View

			Shield	Drain	地線
9	Black	黑	18	Blue/White	藍/白
8	Red	紅	17	Green/White	綠/白
7	Pink	粉紅	16	Orange/White	橙/白
6	Grey	灰	15	Red/White	紅/白
5	Yellow	黃	14	Brown/White	棕/白
4	Green	綠	13	Black/White	黑/白
3	White	白	12	Light Green	淺綠
2	Blue	藍	11	Purple	紫
1	Brown	棕	10	Orange	橙
Conn.	Wire Color	Conn.	Wire Color		

Pin Out

- Note:
- * @C Important Dimension
 - * Waterproof Rate: IP66 Conn.
 - △* Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG+18C+Drain+Al/My Black, PVC Jacket (UV Resistant) OD=8.0mm
 - △* Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

UNIT: mm		TITLE 0 CERES, D SHLD-5A, 18P, CABLE W/O SR F, M, MOLDING, SCREW	Amphenol LTW		ITEM NO	DRAWN BY Ruru	DATE 2023/11/02
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1	安費諾亮泰企業股份有限公司		DWG NO DSD-18BFMM-SR6AXX	CHECKED BY Rita	DATE 2023/11/02
REV. D	SIZE A4	@C: Inspection Item			CUSTOMER ALTW	APPROVED BY Fred	DATE 2023/11/02

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.