

| | | | | | | | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|--|----------|--|-----|--|--------------------|--|
| | | | | | | | | | | | | 8P | | 24 | | MI2A-08PMMS-SS8EXX | |
| | | | | | | | | | | | | 5P | | 22 | | MI2A-05PMMS-SS8EXX | |
| | | | | | | | | | | | | 4P | | | | MI2A-04PMMS-SS8EXX | |
| | | | | | | | | | | | | Contacts | | AWG | | Item No. | |

MI2A-XXPMMS-SS8EXX

XX: No. Of Pin

15:150mm

20:200mm

:

95:950mm

Cable Pitch Unit=50mm

A0:1000mm

:

A5:1500mm

Cable Pitch Unit=100mm

Wire Length (L):150~1500 mm

| | | | | | | | | |
|-------|-------|---|-------|-------|---|-------|--------|---|
| 4 | Black | 黑 | 5 | Gray | 灰 | 8 | Red | 紅 |
| 3 | Blue | 藍 | 4 | Black | 黑 | 7 | Blue | 藍 |
| 2 | White | 白 | 3 | Blue | 藍 | 6 | Pink | 粉 |
| 1 | Brown | 棕 | 2 | White | 白 | 5 | Gray | 灰 |
| | | | 1 | Brown | 棕 | 4 | Yellow | 黃 |
| | | | | | | 3 | Green | 綠 |
| | | | | | | 2 | Brown | 棕 |
| | | | | | | 1 | White | 白 |
| Pin # | Wire | | Pin # | Wire | | Pin # | Wire | |

Pin out

②

③

④

①

4P

②

③

④

⑤

①

5P

③

②

④

⑤

⑥

①

8P

Pin Assignment Front View

4X M3*0.5 (3~4 kgf.cm)

blind holes

19.8 ± 0.1

19.8 ± 0.1

11.50

Section A-A

Recommended Panel Cut-Out

UNIT:mm

TOLERANCE

.X ±0.25

.XX ±0.1

.XXX ±0.05

ANGLES ±1°

SCALE

2:1

SIZE

A4

SHEET

2

OF

2

REV.

D

QC-REV.

A.7

QC

Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

CUSTOMER

ALTW

DRAWN BY

Jiahe Lin

CHECKED BY

Allen Pan

APPROVED BY

Fred Lee

DATE

2022-07-08

DATE

2022-07-08

DATE

2022-07-08

8

W10814-03-00001A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.




MI2A-XXPMMS-SS8EXX

XX: No. Of Pin


15: 150mm
20: 200mm
:
95: 950mm
Cable Pitch Unit=50mm
A0: 1000mm
:
A5: 1500mm
Cable Pitch Unit=100mm
Wire Length (L): 150~1500 mm

| | | | | | | | | |
|-------|-------|---|-------|-------|---|---|--------|---|
| 4 | Black | 黑 | 5 | Gray | 灰 | 8 | Red | 紅 |
| 3 | Blue | 藍 | 4 | Black | 黑 | 7 | Blue | 藍 |
| 2 | White | 白 | 3 | Blue | 藍 | 6 | Pink | 粉 |
| 1 | Brown | 棕 | 2 | White | 白 | 5 | Gray | 灰 |
| | | | 1 | Brown | 棕 | 4 | Yellow | 黃 |
| Pin # | Wire | | Pin # | Wire | | 3 | Green | 綠 |
| | | | | | | 2 | Brown | 棕 |
| | | | | | | 1 | White | 白 |

Pin out




Pin Assignment Front View

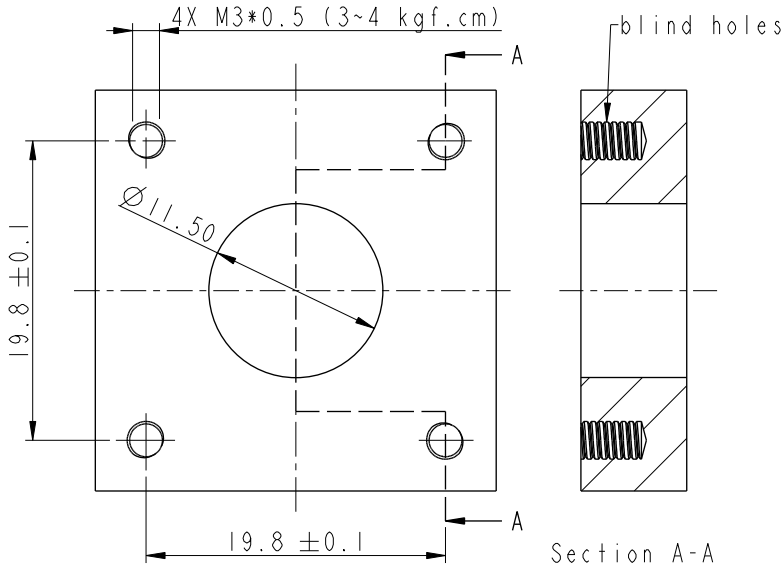

Recommended Panel Cut-Out

UNIT:mm



TITLE
N SEN, M2 A, SCREW
RECEPTACLE, M, M, SOLDER

Amphenol LTW

ITEM NO

DRAWN BY

DATE

DWG NO

CHECKED BY

DATE

CUSTOMER

APPROVED BY

DATE

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

SCALE 2:1

SIZE A4

SHEET 2 OF 2

REV. D

WC-REV. A.7

QC: Inspection item

安費諾亮泰企業股份有限公司

MI2A-XXPMMS-SS8EXX

ALTW

Jiahe Lin

2022-07-08

Allen Pan

2022-07-08

Fred Lee

2022-07-08