



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2023/04/14	Jiahe Lin	Rev.02 To Rev.A

M8A-XXBFFM-SL7CXX
 XX: No. Of Pin
 XX: 01~15Meters
 01: 01Meter
 02: 02Meters
 :
 15: 15Meters

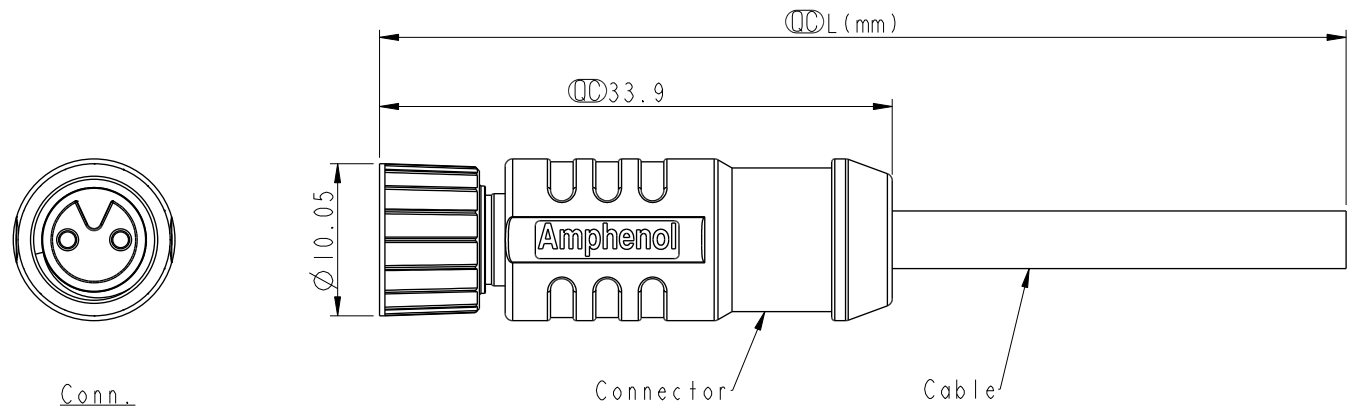

Note:
 * RoHS Compliant
 * \varnothing Important dimension
 * Waterproof rate: IP67, Mated
 * Connector
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 O-ring: Rubber, Gray
 Nut: Metal
 Outer mold: Thermoplastic, Black
 * Cable: IEC61156-12, 26#*IP+AL/MY+B,
 OD=3.8mm, PUR Jacket, Green
 * Cable length tolerance: 1M: +50/-0 mm
 1M < L ≤ 3M: +100/-0 mm
 3M < L ≤ 5M: +150/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 15M: ±200 mm



3	White	白
1	Blue	藍
Connector	Wire Color	
Pin Out		

2P
 Pin Assignments
 Front View

UNIT:mm			TITLE N SEN, M8 W/KEY, SCREW CABLE W/O SR, F, F, MOLDING		
TOLERANCE	±0.5mm		SCALE 1:1	SIZE A4	SHEET 1 OF 1
REV. A	WC-REV. A.5	\varnothing : Inspection item	Amphenol LTW 安費諾亮泰企業股份有限公司		

ITEM NO	DRAWN BY Jiahe Lin	DATE 2023/04/14
DWG NO M8A-XXBFFM-SL7CXX	CHECKED BY Neo Tsai	DATE 2023/04/14
CUSTOMER ALTW	APPROVED BY Max Yang	DATE 2023/04/14