
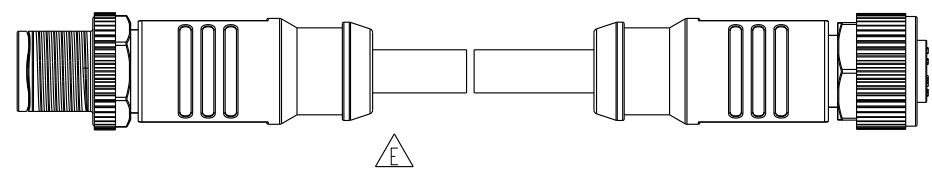


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C210497	2021/03/31	Ruru	△C X2
D	C222007	2022/12/27	Ruru	△D X2
E	C230829	2023-07-10	JC Chen	△E X1


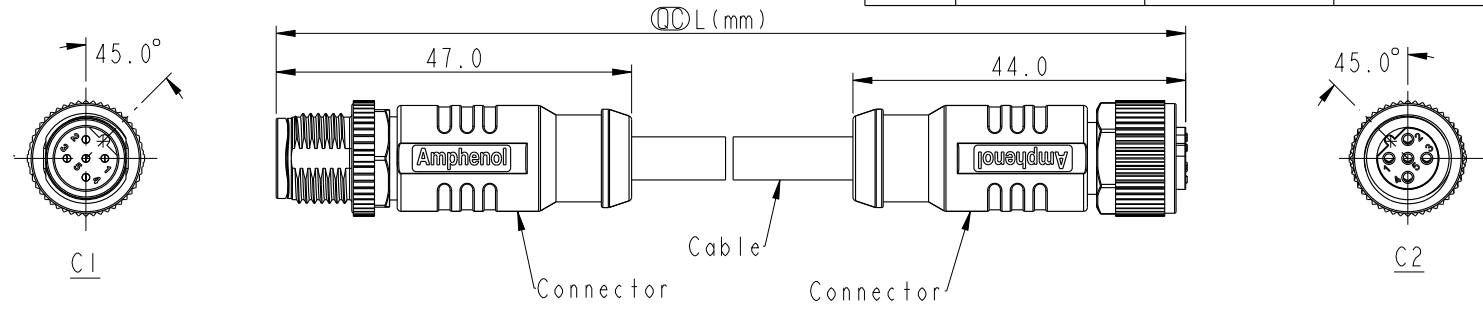


Note: △C

- * RoHS Compliant
- * Ⓞ Important dimension
- * C1
- △D Waterproof rate: IP68, mated 1m/24h IP69K, mated
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- Nut: Metal
- Shield: Metal
- Outer mold: Thermoplastic, Black
- * C2
- △D Waterproof rate: IP68, mated 1m/24h IP69K, mated
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- O-Ring: Rubber, Gray
- Nut: Metal
- Shield: Metal
- Outer mold: Thermoplastic, Black
- * Cable: UL2517, Shield, 22#*5C+AL/MY+B, OD=5.7mm, PVC Jacket, Black
- * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
1M < L ≤ 3M: +120/-0 mm
3M < L ≤ 5M: +160/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

MSBSXXXML-SBSFL-SDXXX
 XX: No. Of Pin
 XXX: 0.5~99Meters
 A05: 0.5 Meter
 1: 01 Meter
 2: 02 Meters
 :
 99: 99 Meters

Pin Out	Shield	Wire
5	Gray	灰
4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕

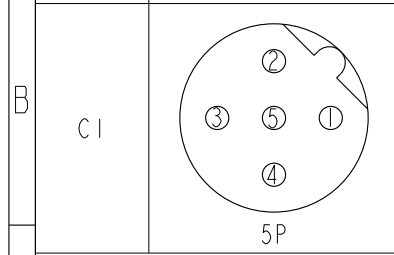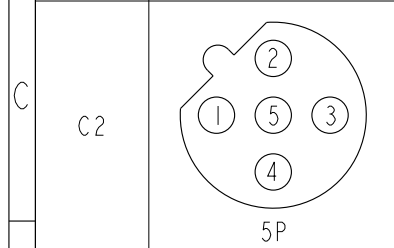

Pin Assignments Front View

UNIT:mm		TITLE	ACC, SEN, B Code, DB-ENDED MF
TOLERANCE	± 0.5mm	SCALE	1:1
		SIZE	A4
		SHEET	1 OF 1
REV.	E	WC-REV.	A
		Ⓞ	Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
ALTW	Neo	2019/01/24