


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C210237	2021/03/30	Ruru	△C X2
D	C222002	2022/12/29	Ruru	△D X1
E	C230829	2023-07-10	JC Chen	△E X2

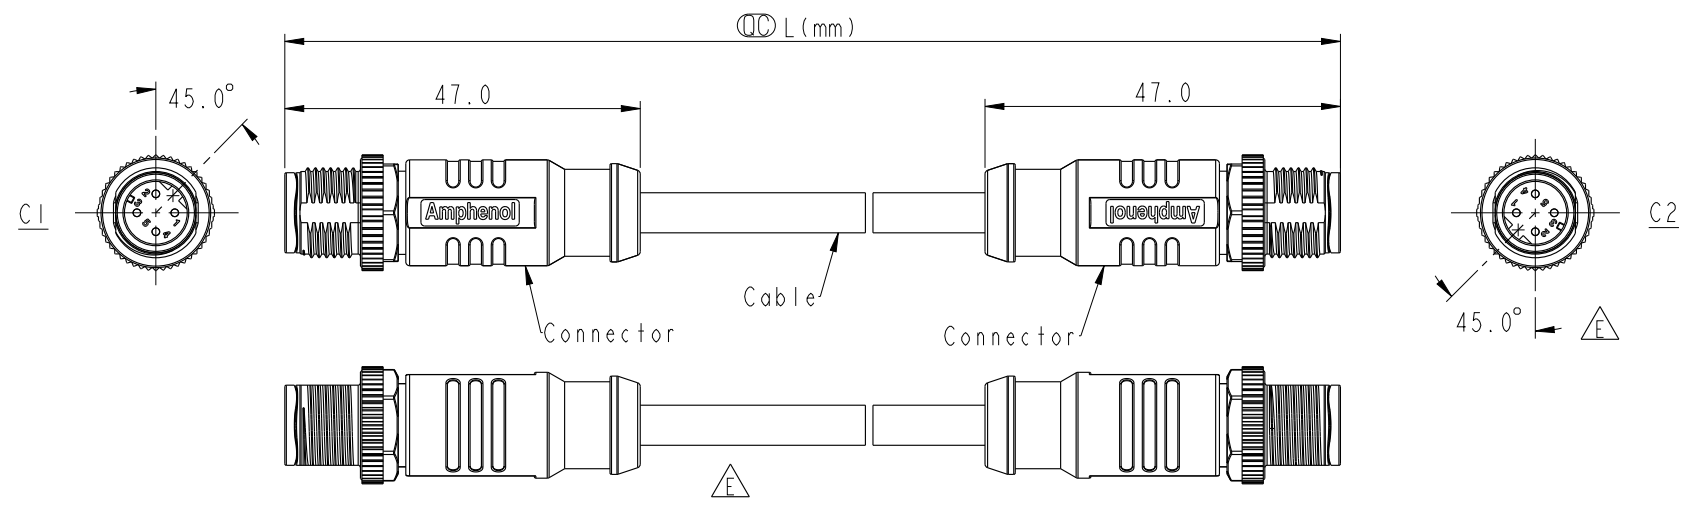

Pin Out	5	Shield	
	4	Black	黑
	3	Blue	藍
	2	White	白
	1	Brown	棕
Pin #	Wire		
C1 & C2			
	4P		

MSDSXXML-SDSML-SBXXX
 XX: No. Of Pin
 XXX: 0.5~99Meters
 A05: 0.5 Meter
 1: 01 Meter
 2: 02 Meters
 :
 99: 99 Meters

Note: △C
 * RoHS Compliant
 * (C) Important dimension
 △D * Waterproof rate: IP68, mated 1m/24h
 IP69K, mated
 * Connector:
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Nut: Metal
 Shield: Metal
 Outer mold: Thermoplastic, Black
 * Cable: UL20549, Shield, 22#*4C+AL/MY+B, OD=5.3mm, PU Jacket, Black
 * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

UNIT:mm TOLERANCE ± 0.5mm	TITLE ACC, SEN, D Code, DB-ENDED MM		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Brady	DATE 2019/01/24
	SCALE 1:1	SIZE A4		SHEET 1 OF 1	DWG NO MSDSXXML-SDSML-SBXXX	CHECKED BY Eagle
REV. E	WC-REV. A	(C) Inspection item	CUSTOMER ALTW	APPROVED BY Neo	DATE 2019/01/24	