

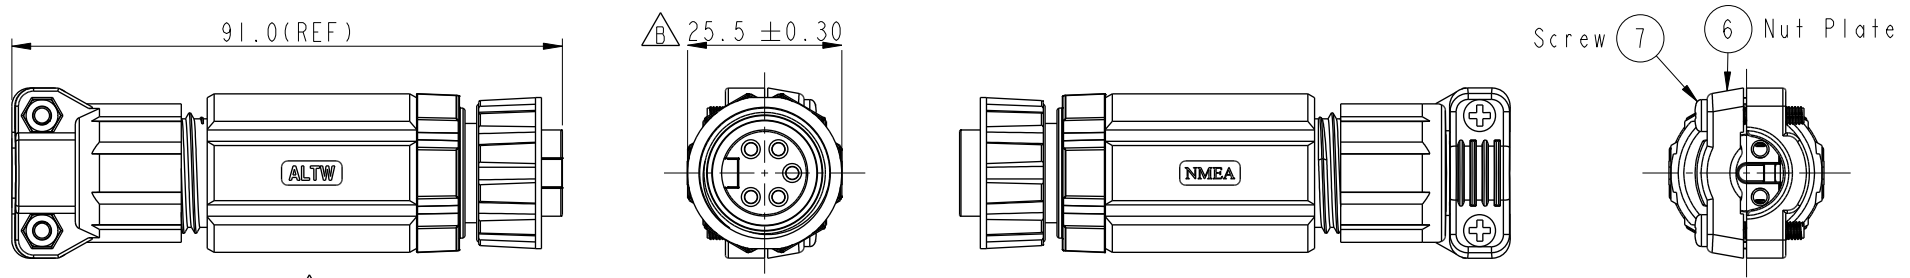


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1160060	2011/03/04	Doreen	Change Dimension View.
C	C221447	2022/09/15	Ruru	$\triangle C$ X4
D	C231296	2023/10/13	Vicky	$\triangle D$ X1

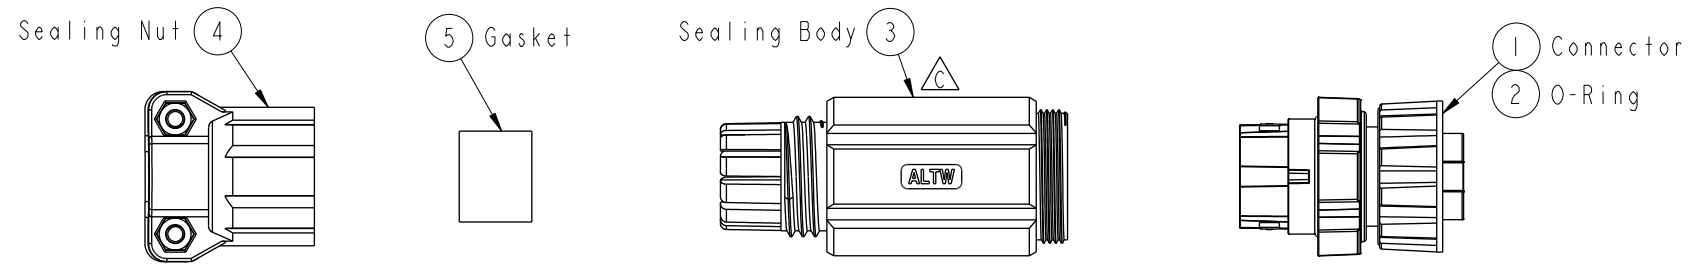

Conn.
Pin Assignments
Front View

Conn.	Name	Pair	Wire Color	For User
5	NET-L	Signal	Blue 藍	(18AWG)
4	NET-H	Signal	White 白	(18AWG)
3	NET-C	Power	Black 黑	(15AWG)
2	NET-S	Power	Red 紅	(15AWG)
1	Shield	Drain	Bare	(18AWG)

Pin Out

- $\triangle C$ Note:
- * CC Important Dimension.
 - * Waterproof Rate : IP67
 - * Connector: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * O-Ring 1: Rubber, Gray.
 - * O-Ring 2: Rubber, Gray.
 - * Holder: Thermoplastic, Black.
 - * Gasket: Rubber, Black.
 - * Sealing Nut: Thermoplastic, Black.
 - * Nut: Metal.
 - * Seals For Cable OD $\varnothing 8\text{mm} \sim \varnothing 12.2\text{mm}$
 - * 使用温度: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
- $\triangle D$ * One set assembled in one pe bag

UNIT: mm

TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^{\circ}$

TITLE NMEA, MN 8A(APP), 05P CABLE W/O SR, F, F, FI SCREW IN			
SCALE 1:2	SIZE A4	SHEET 1 OF 1	
REV. D	WC-REV. A.1	CC : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO. UMN-05BFFB-SL7001	DRAWN BY Doreen	DATE 2011/03/04
DWG NO. UMN-05BFFB-SL7001	CHECKED BY Winnie	DATE 2011/03/04
CUSTOMER ALTW	APPROVED BY Kevin	DATE 2011/03/04