
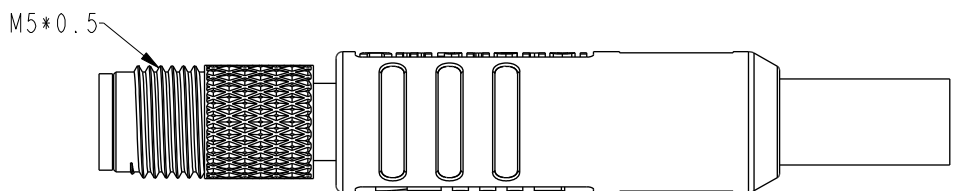


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2023-03-27	Jerry Hsiao	Rev.01 to A, Initial Released

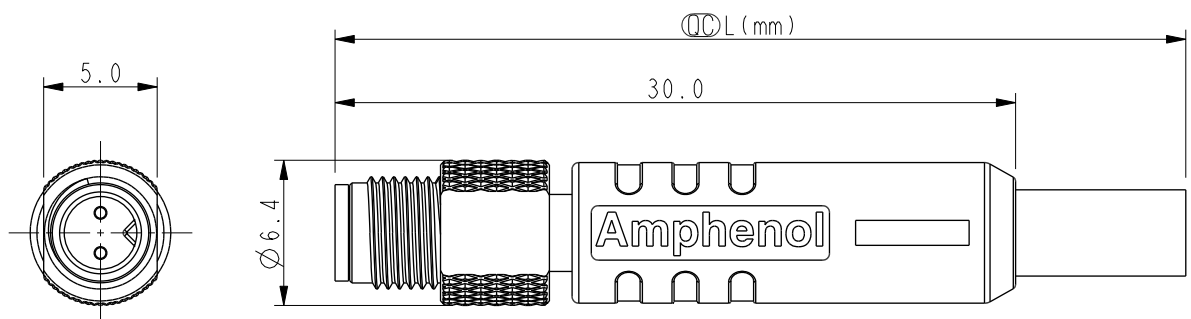


M5-XXBMMM-SL7CXX

XX: No. Of Pin

XX:L=01~99Meters
 01:L=1Meter
 02:L=2Meters
 :
 99:L=99Meters

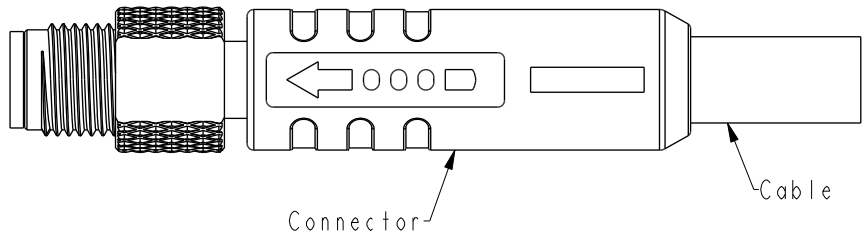

2	White	白
1	Blue	藍
Pin #	Wire	



Pin Assignments Front View

Note:

- * RoHS Compliant
- * \varnothing Important Dimension
- * Waterproof Rate: IP67, Mated.
- * Connector Housing: Thermoplastic, Black.
- Pin: Copper Alloy, Gold Plated.
- Nut: Metal.
- Outer mold: Thermoplastic, Black.
- * Cable: IEC61156-12, 26#*IP+AL/MY+B, OD=3.8mm, PUR Jacket, Green
- * Cable Length Tolerance:
 - 1M: +50/-0 mm
 - 1M < L ≤ 3M: +100/-0 mm
 - 3M < L ≤ 5M: +150/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm

UNIT:mm TOLERANCE ±0.5mm	TITLE N SEN, M5, SCREW CABLE W/O SR, M, M, MOLDING			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Allen Pan	DATE 2023-02-23
	SCALE 3:1	SIZE A4	SHEET 1 OF 1		DWG NO M5-XXBMMM-SL7CXX	CHECKED BY Sam Ho	DATE 2023-02-23
	REV. A	WC-REV.	\varnothing : Inspection item		CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2023-02-23