
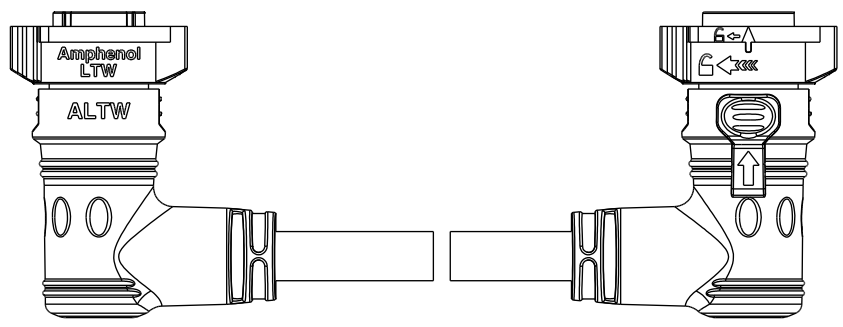
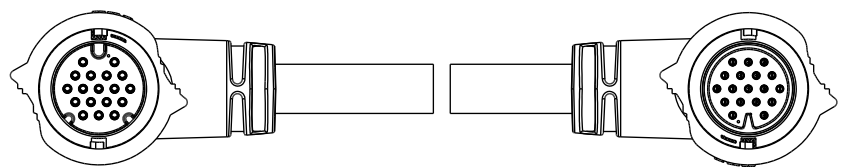


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C220465	2022/03/30	Ruru	$\triangle B$ X2
C	C230187	2023/02/14	Vicky	$\triangle C$ X2
D	C231263	2023/09/28	Ruru	$\triangle D$ X2

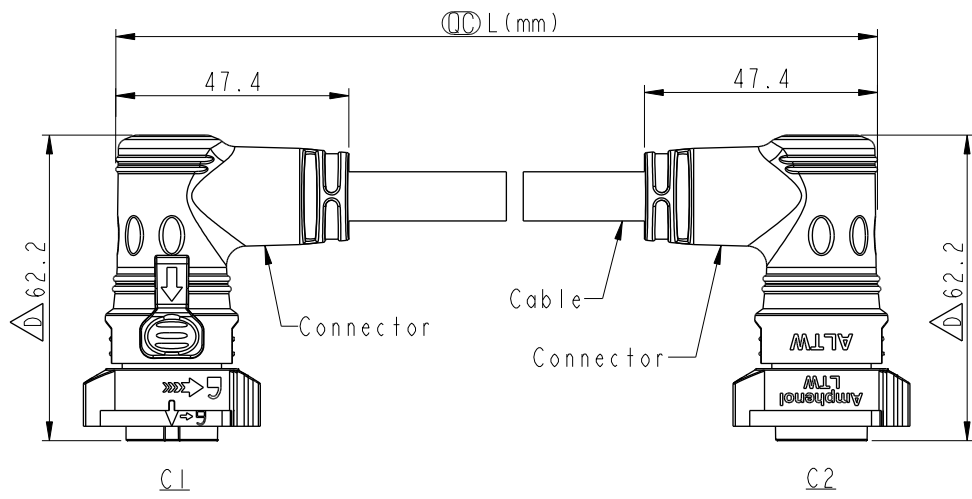

- Note: $\triangle B$
- * RoHS Compliant
 - * CC Important dimension
 - * C1
 - $\triangle C$ Waterproof rate: IP68, mated 1m/24h
 Housing: Thermoplastic, Black
 Pin: Copper Alloy, Gold Plated
 O-Ring: Rubber, Dark Gray
 Nut: Thermoplastic, Black
 Outer mold: Thermoplastic, Black
 - * C2
 - $\triangle C$ Waterproof rate: IP68, mated 1m/24h
 Housing: Thermoplastic, Black
 Pin: Copper Alloy, Gold Plated
 O-Ring: Rubber, Dark Gray
 Nut: Thermoplastic, Black
 Outer mold: Thermoplastic, Black
 - * Cable: UL21388, PVC Jacket, Black
 - * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

UNIT: mm			TITLE ACC, XLOK, D-5A, DB-ENDED FF
TOLERANCE ±0.5 mm	SCALE 1:2	SIZE A4	SHEET 1 OF 2
REV. D	WC-REV.	CC : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Ruru	DATE 2020-01-14
DWG NO. AB-DDXXFR-DDBR-QDXXX	CHECKED BY Rita	DATE 2020-01-14
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-14

