


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2023/04/14	Vincent Huang	Rev.02 to A.

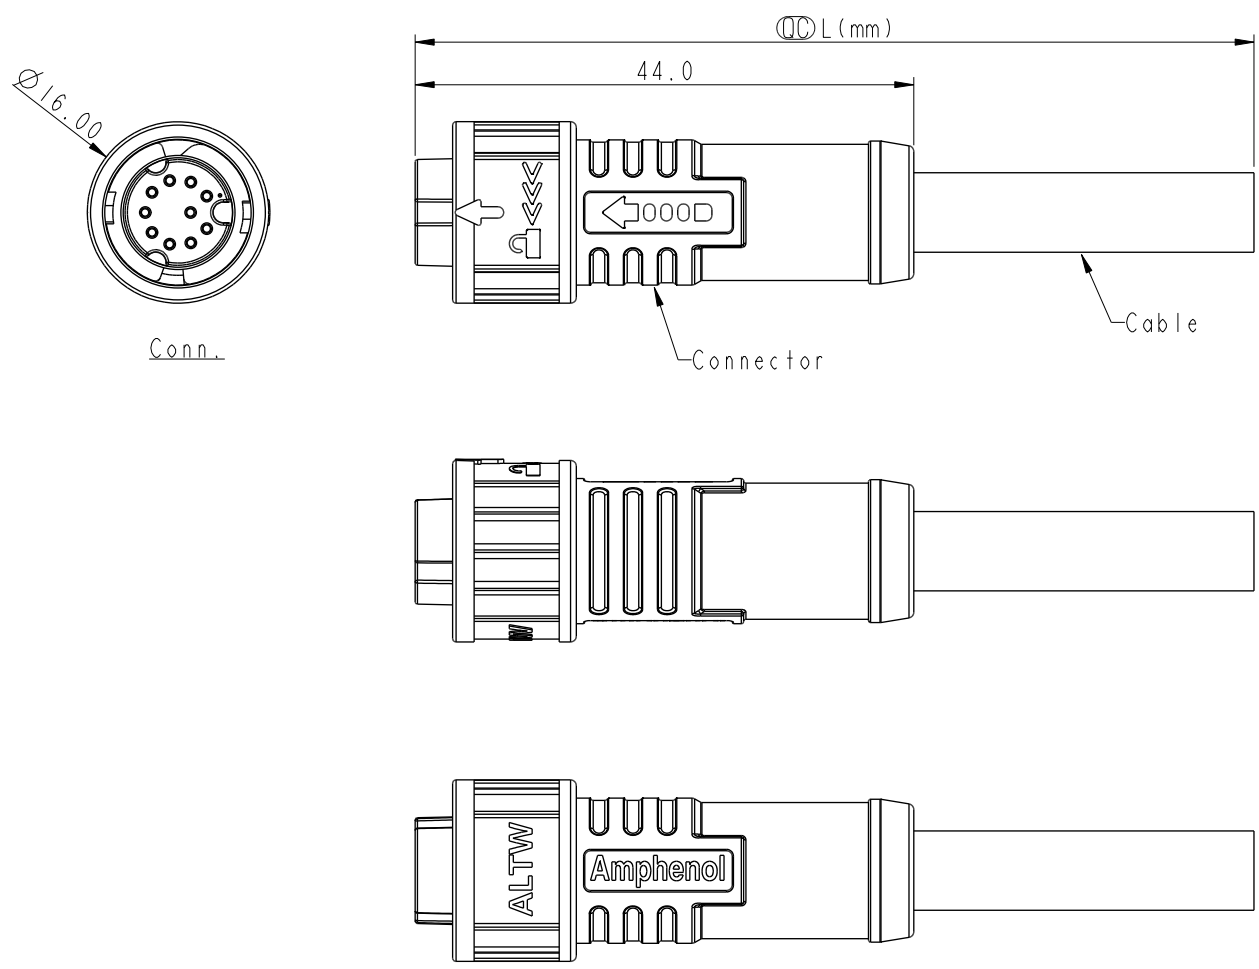

Note:

- * RoHS Compliant
- * \varnothing Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Gray
 - Nut: Thermoplastic, Black
 - Outer mold: Thermoplastic, Black
- * Cable: UL21388, PVC Jacket, Black
- * Cable length tolerance:

1M < L ≤ 3M:	+100/-0 mm
3M < L ≤ 5M:	+150/-0 mm
5M < L ≤ 10M:	±100 mm
10M < L ≤ 20M:	±200 mm
20M < L ≤ 30M:	±300 mm
30M < L ≤ 99M:	±500 mm

UNIT: mm	
TOLERANCE	±0.5mm


TITLE XLOK, A-1.5A, CABLE W/O SR F, F, MOLDING, PUSH LOCK			
SCALE 3:2	SIZE A4	SHEET 1 OF 2	
REV. A	WC-REV. .0	\varnothing : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Vincent Huang	DATE 2022/11/03
DWG NO. AZ-XXBFFM-QL8DXX	CHECKED BY Aric Ko	DATE 2022/11/03
CUSTOMER ALTW	APPROVED BY Max Yang	DATE 2022/11/03

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

10P	6.0	26	AZ-10BFFM-QL8DXX
Contacts	Cable OD	AWG	Item No.



Pin Out	10	Violet	紫
	9	Black	黑
	8	Red	紅
	7	Blue	藍
	6	Orange	橘
	5	Gray	灰
	4	Yellow	黃
	3	Green	綠
	2	Brown	棕
	1	White	白
	Pin #	Wire	

Pin Assignments Front View

UNIT:mm		
TOLERANCE	±0.5mm	

TITLE XLOK, A-1.5A, CABLE W/O SR F, F, MOLDING, PUSH LOCK		
SCALE 3:2	SIZE A4	SHEET 2 OF 2
REV. A	WC-REV. .0	: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vincent Huang	DATE 2022/11/03
DWG NO AZ-XXBFFM-QL8DXX	CHECKED BY Aric Ko	DATE 2022/11/03
CUSTOMER ALTW	APPROVED BY Max Yang	DATE 2022/11/03

AZ-XXBFFM-QL8DXX
XX: No. Of Pin
XX: 01~99Meters
01: 01Meter
02: 02Meters
:
99: 99Meters