




5	6	7	8
REV. B	ECN NO. C230494	DATE 2023/04/14	SIGN Ruru
			DESCRIPTION AX4

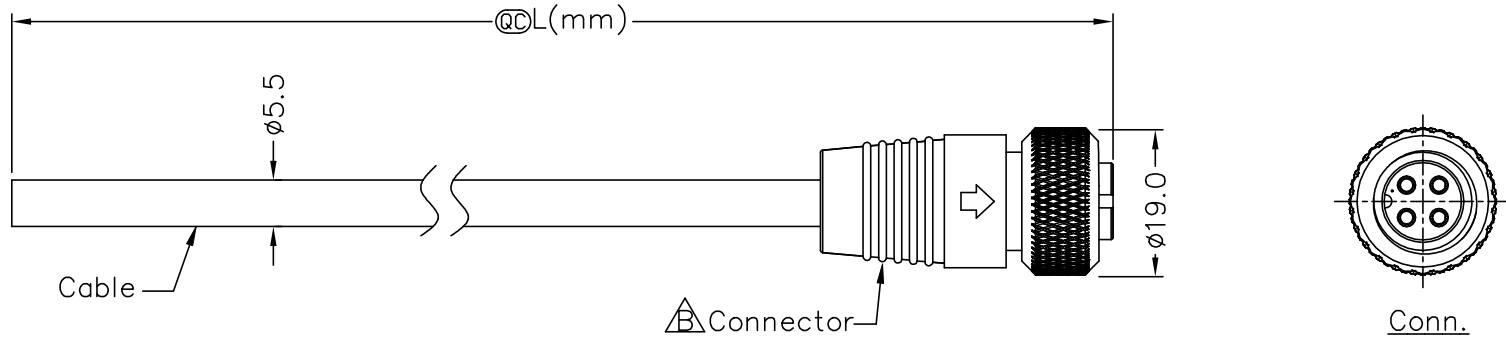

BSB-04BFFM-SL7AXX  
 XX: 01~99Meter  
 01: 01Meter  
 02: 02Meters  
 ...  
 99: 99Meters  
 Cable Length(L): 01~99Meters

- Note:**
- \* @C Important Dimension
  - \* Waterproof Rate: IP67, mated
  - \* Connector
    - Housing: Thermoplastic, Black
    - Pin: Copper Alloy, Gold Plated
    - Nut: Metal
    - Shell: Metal
    - O-Ring: Rubber, Black
  - \* Cable: UL2464 20AWG\*4C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.5mm, Black
  - \* Cable Length Tolerance:
    - 01M: ±40mm
    - 02M~05M: ±60mm
    - 06M~10M: ±100mm
    - 11M~30M: ±200mm
    - 31M~99M: ±500mm



Pin Assignments  
Front View

Shield	Drain	地線
4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

UNIT: mm	
TOLERANCE	
±0.5 mm	

TITLE 0 CERES, B SHLD-10A, 04P, CABLE W/O SR F, F, MOLDING, SCREW		
SCALE Free	SHEET 1 OF 1	
REV. B	SIZE A4	@C : Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2010/01/12
DWG NO BSB-04BFFM-SL7AXX	CHECKED BY Rita	DATE 2010/01/12
CUSTOMER ALTW	APPROVED BY Lion	DATE 2010/01/12

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.