



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN-080135	2010/08/17	Kevin Wang	Modiyf The Front View and Note
E	LEN1710110~15	2017/01/17	Ruru	Change Logo
F	C230494	2023/04/14	Ruru	△X4

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

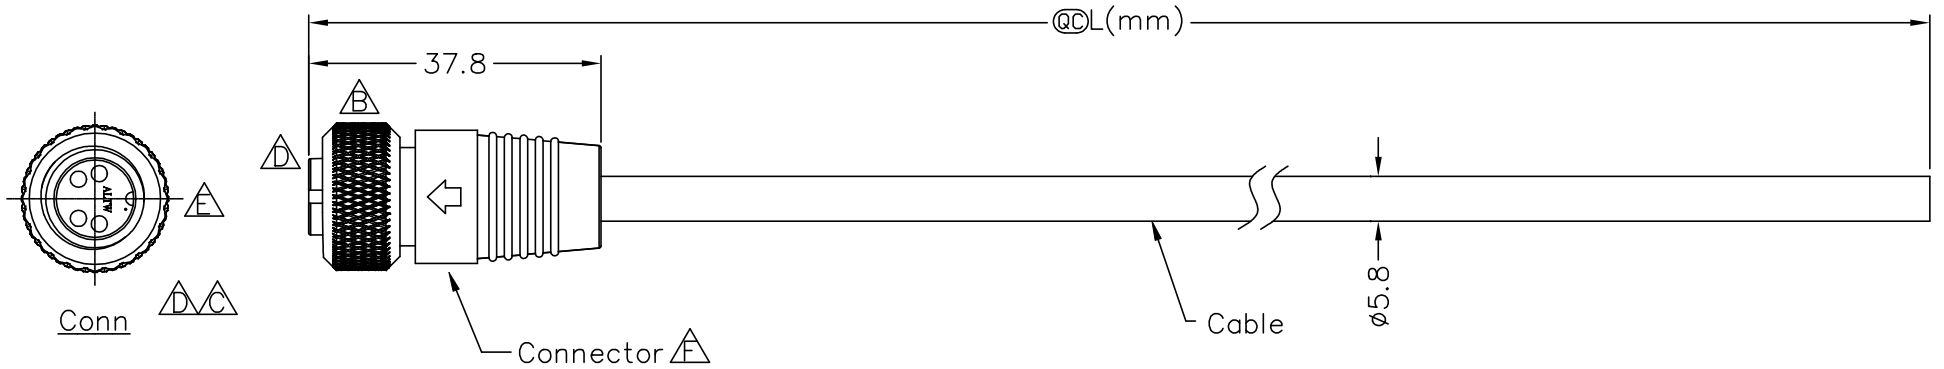


BSD-04BFFM-SL6AXX

XX: 01~99Meter
 01: 01Meter
 02: 02Meters
 ...
 99: 99Meters

Cable Length(L): 01~99Meters

- △ Note:
- * @C Important Dimension
 - * Waterproof Rate: IP66, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Gold Plated
 - Nut: Metal
 - Shell: Metal
 - O-Ring: Rubber, Black
 - * Cable: UL2464 20AWG*4C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.8mm, Black
 - △△△ * Cable Length Tolerance:
 - 01M: ±40mm
 - 02M~05M: ±60mm
 - 06M~10M: ±100mm
 - 11M~30M: ±200mm
 - 31M~99M: ±500mm



Pin Assignments
Front View

Shield	Drain	地線
4	Yellow	黃
3	Red	紅
2	Green	綠
1	White	白
Conn	Wire Color	
Pin Out		

UNIT: mm	
TOLERANCE	
±0.5mm	

TITLE		0 CERES, B SHLD-5A, 04P, CABLE W/O SR	
		F, F, MOLDING, SCREW	
SCALE	Free	SHEET	1 OF 1
REV.	F	SIZE	A4
@C: Inspection Item			

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	Ruru	DATE	2017/01/17
DWG NO	CHECKED BY	Rita	DATE	2017/01/17
BSD-04BFFM-SL6AXX	APPROVED BY	Max	DATE	2017/01/17
CUSTOMER	ALTW			