




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN-920137~40	2008/10/06	Li Xiu Zhi	Change Front View
E	LEN1710120~24	2017/01/17	Ruru	Change Logo
F	C230494	2023/04/14	Ruru	△X4

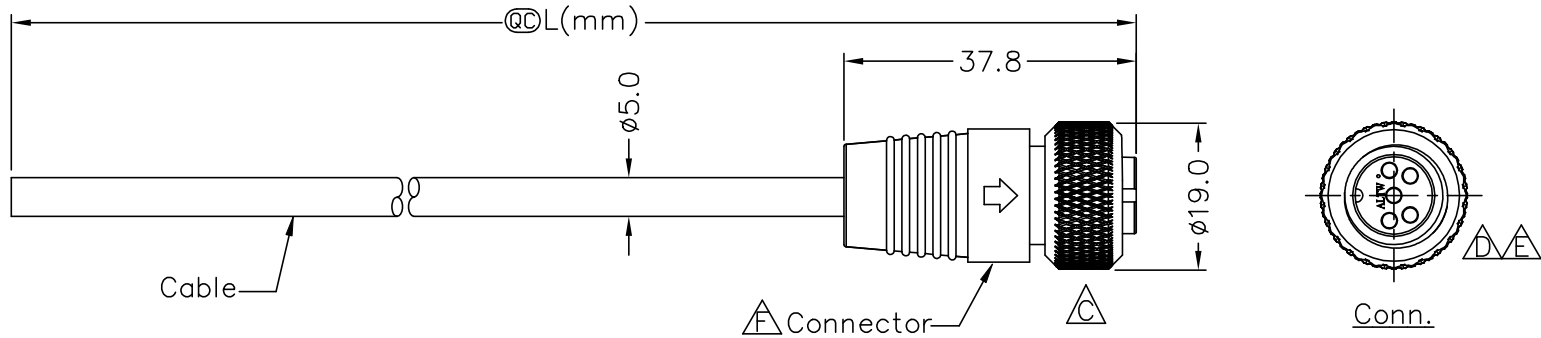

BSD-05BFFM-SL6AXX  
 XX: 01~99Meter  
 01: 01Meter  
 02: 02Meters  
 :  
 :  
 99: 99Meters  
 Cable Length(L): 01~99Meters



- △ Note:
- \* @C Important Dimension
  - \* Waterproof Rate: IP66, mated
  - \* Connector Housing: Thermoplastic, Black  
Pin: Copper Alloy, Gold Plated  
Nut: Metal  
Shell: Metal  
O-Ring: Rubber, Black
  - \* Cable: UL2464 24AWG\*5C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.0mm, Black
  - △\* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm  
06M~10M: ±100mm  
11M~30M: ±200mm  
31M~99M: ±500mm



Pin Assignments  
Front View

Shield	Drain	地線	△
5	Green	綠	
4	White	白	
3	Black	黑	
2	Blue	藍	
1	Brown	棕	
Conn.	Wire Color		
	Pin Out		

UNIT: mm	
TOLERANCE	±0.5 mm

TITLE 0 CERES, B SHLD-5A, 05P, CABLE W/O SR F, F, MOLDING, SCREW △	
SCALE Free	SHEET 1 OF 1
REV. F	SIZE A4
◎: Inspection Item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2017/01/17
DWG NO BSD-05BFFM-SL6AXX	CHECKED BY Rita	DATE 2017/01/17
CUSTOMER ALTW	APPROVED BY Max	DATE 2017/01/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.