



REV.	ECN NO.	DATE	SIGN.	DESCRIPTION
E	LEN-040083~87	2010/04/02	Li Xiu Zhi	Change 19.2 to 19.0
F	LEN1710129~33	2017/01/17	Ruru	Change Logo
G	C230494	2023/04/18	Ruru	△G X4

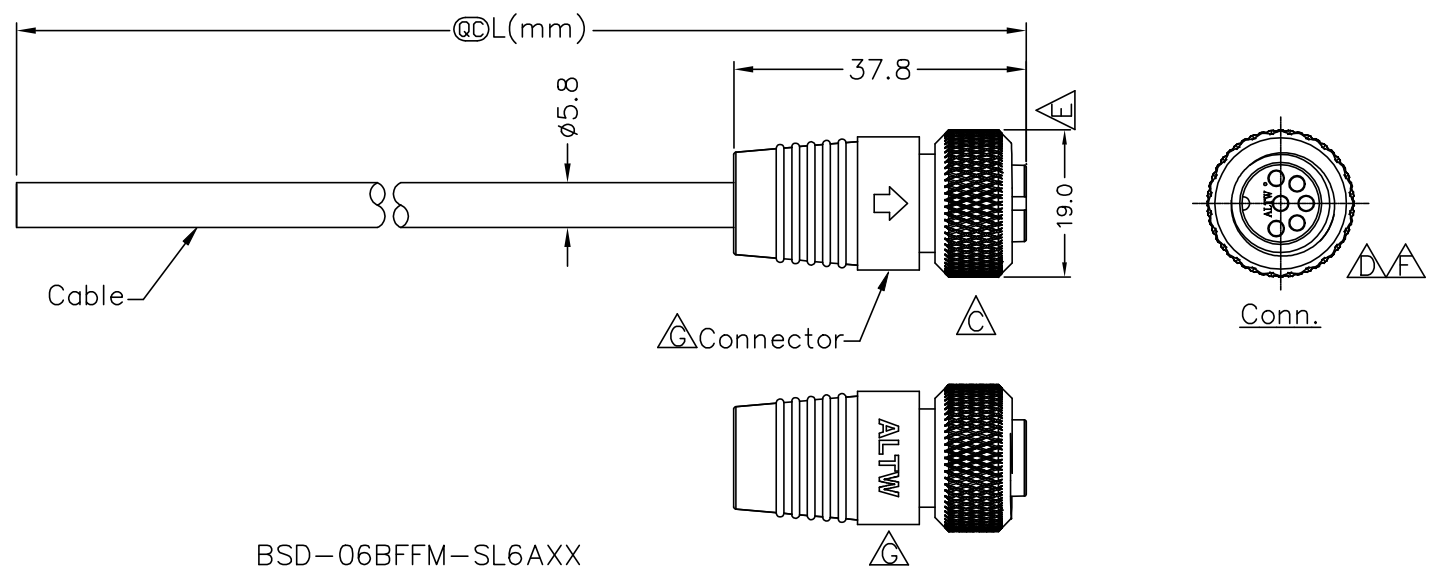

BSD-06BFFM-SL6AXX  
 ↑  
 XX: 01~99Meter  
 01: 01Meter  
 02: 02Meters  
 :  
 :  
 99: 99Meters  
 Cable Length(L): 01~99Meters

- △G Note:
- \* @C Important Dimension
  - \* Waterproof Rate: IP66, mated
  - \* Connector  
 Housing: Thermoplastic, Black  
 Pin: Copper Alloy, Gold Plated  
 Nut: Metal  
 Shell: Metal  
 O-Ring: Rubber, Black
  - \* Cable: UL2464 24AWG\*6C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.8mm, Black
  - △\* Cable Length Tolerance: 01M: ±40mm  
 02M~05M: ±60mm  
 06M~10M: ±100mm  
 11M~30M: ±200mm  
 31M~99M: ±500mm



Pin Assignments  
Front View

Shield	Drain	地線
6	White	白
5	Red	紅
4	Orange	桔
3	Yellow	黃
2	Green	綠
1	Blue	藍
Conn.	Wire Color	
	Pin Out	

UNIT: mm	TITLE 0 CERES, B SHLD-5A, 06P, CABLE W/O SR F, F, MOLDING, SCREW	
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1
REV. G	SIZE A4	◎: Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2017/01/17
DWG NO BSD-06BFFM-SL6AXX	CHECKED BY Rita	DATE 2017/01/17
CUSTOMER ALTW	APPROVED BY Max	DATE 2017/01/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.