


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN1710078~82	2017/01/17	Ruru	Change Logo
E	C230494	2023/04/18	Ruru	△X4
F	C231140	2023/09/01	Vicky	△X1




BSD-07BFFM-SL6AXX

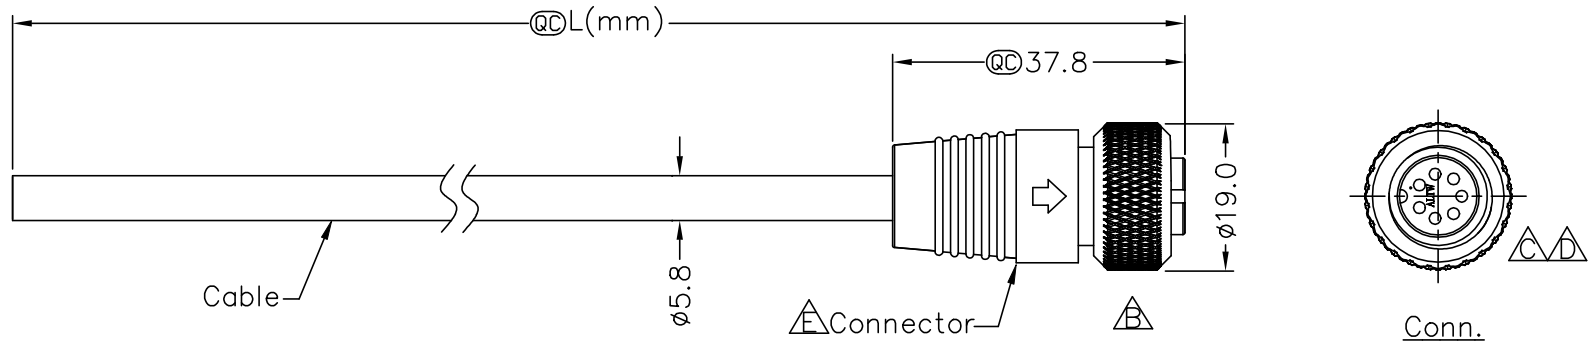


XX: 01~99Meter  
01: 01Meter  
02: 02Meters  
:  
:  
99: 99Meters

Cable Length(L): 01~99Meters

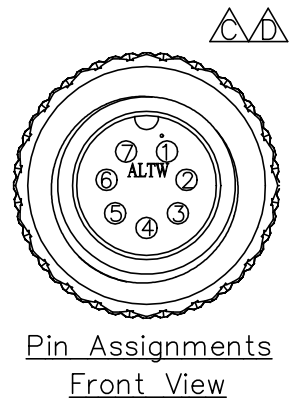- △ Note:
- \* QC Important Dimension
  - \* Waterproof Rate: IP66, mated
  - \* Connector
  - Housing: Thermoplastic, Black
  - Pin: Copper Alloy, Gold Plated
  - Nut: Metal
  - Shell: Metal
  - O-Ring: Rubber, Black
  - \* Cable: UL2464 24AWG\*7C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.8mm, Black
  - △ \* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm  
06M~10M: ±100mm  
11M~30M: ±200mm  
31M~99M: ±500mm



Shield	Drain	地線
7	White	白
6	Green	綠
5	Brown	棕
4	Red	紅
3	Yellow	黃
2	Orange	桔
1	Blue	藍
Conn.	Wire Color	
Pin Out		

UNIT: mm		TITLE				
TOLERANCE		O CERES, B SHLD-5A, 07P, CABLE W/O SR				
		F, F, MOLDING, SCREW 				
		SCALE	Free	SHEET	1 OF 1	
±0.5 mm		REV.	E	SIZE	A4	 : Inspection Item

**Amphenol LTW**

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2017/01/17
DWG NO BSD-07BFFM-SL6AXX	CHECKED BY Rita	DATE 2017/01/17
CUSTOMER ALTW	APPROVED BY Max	DATE 2017/01/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.