



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-920176~79	2008/09/16	Li Xiu Zhi	Change View
D	LEN1710138~43	2017/01/17	Ruru	Change Logo
E	C230494	2023/04/18	Ruru	△X6

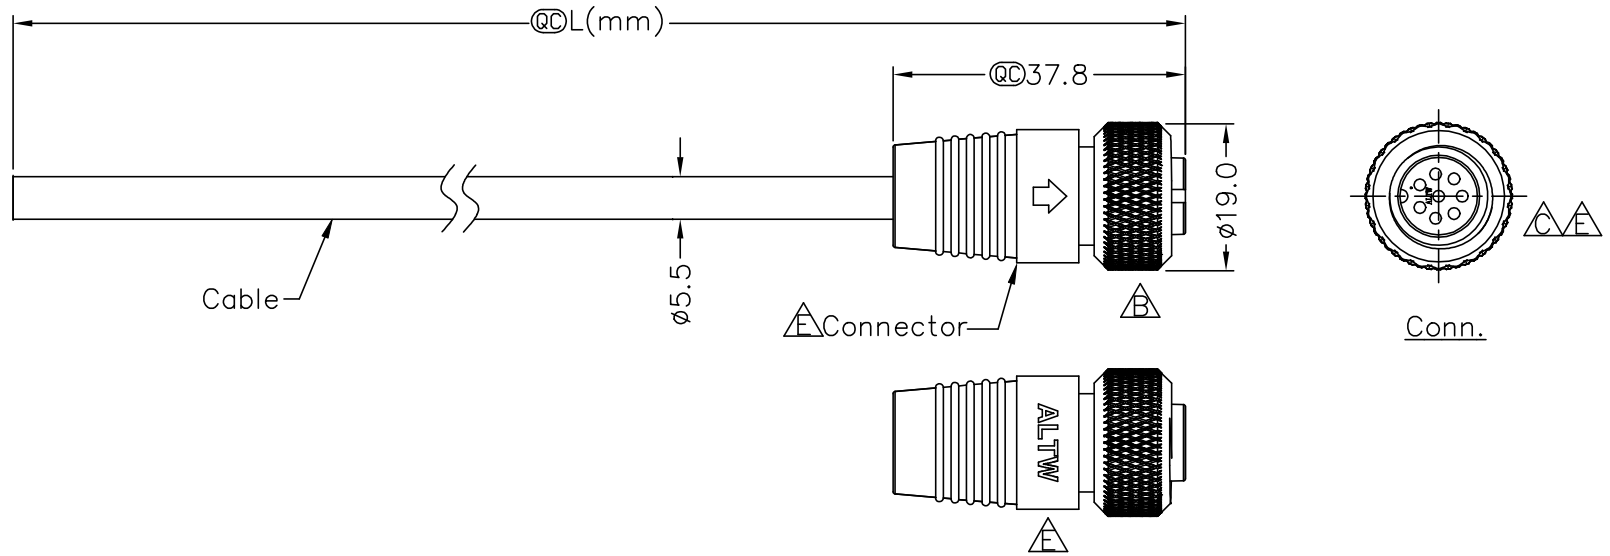

BSD-08BFFM-SL6AXX
 ↑
 XX: 01~99Meter
 01: 01Meter
 02: 02Meters
 :
 :
 99: 99Meters
 Cable Length(L): 01~99Meters

- △ Note:
- * @ Important Dimension
 - * Waterproof Rate: IP66, mated
 - * Connector
- Housing: Thermoplastic, Black
 Pin: Copper Alloy, Gold Plated
 Nut: Metal
 Shell: Metal
 O-Ring: Rubber, Black
- △* Cable: UL2464 24AWG*8C+Drain+Al/My,
 PVC Jacket UV Resistant, OD=5.5mm, Black
- △* Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

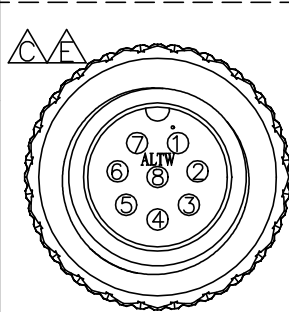

Pin Assignments
Front View

Shield	Drain	地線
8	Green	綠
7	Yellow	黃
6	Orange	桔
5	Red	紅
4	Blue	藍
3	White	白
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
	Pin Out	△

UNIT: mm	
TOLERANCE	±0.5 mm

TITLE 0 CERES, B SHLD-5A, CABLE W/O SR F, F, MOLDING, SCREW △	
SCALE Free	SHEET 1 OF 1
REV. E	SIZE A4
◎: Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2017/01/17
DWG NO BSD-08BFFM-SL6AXX	CHECKED BY Rita	DATE 2017/01/17
CUSTOMER ALTW	APPROVED BY Max	DATE 2017/01/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.