



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-790215	2007/09/13	WUFEI	Change Nut
C	C230494	2023/04/18	Ruru	△ X4

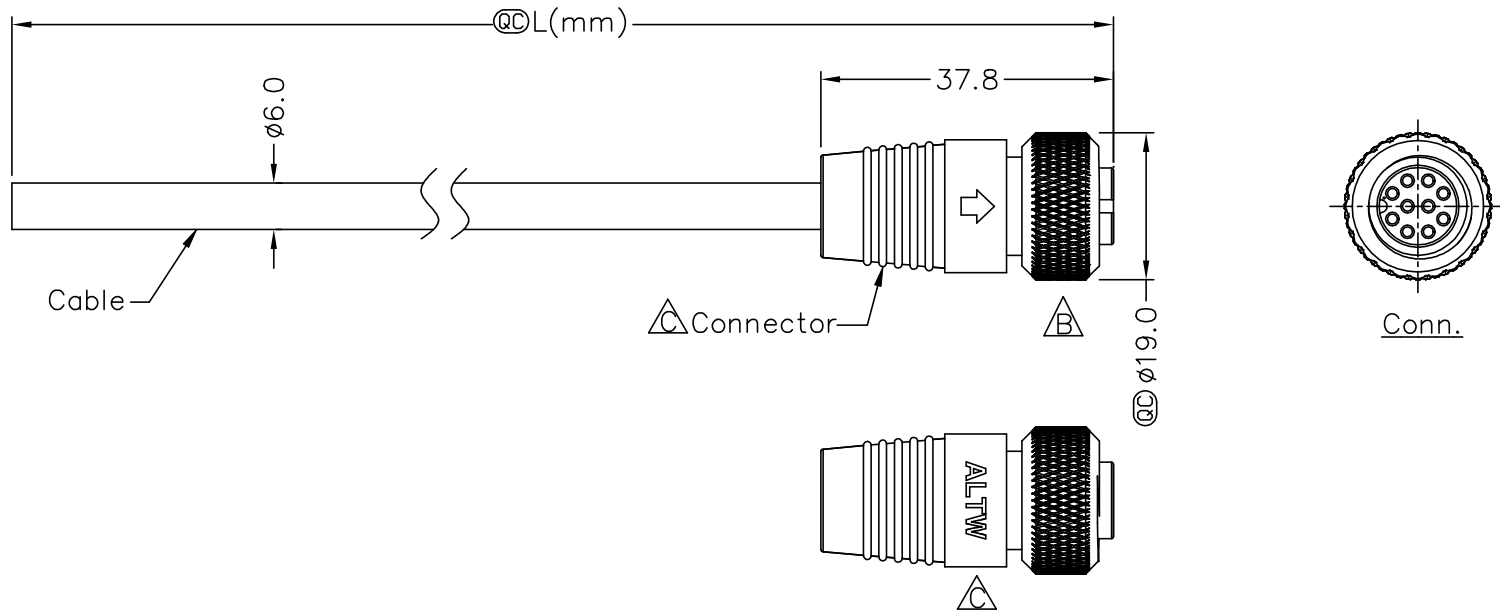

Pin Assignments
Front View

Shield	Drain
10	Orange
9	Black
8	Red
7	Pink
6	Gray
5	Yellow
4	Green
3	White
2	Blue
1	Brown
Conn.	Wire Color
	Pin Out

BSU-10BFFM-SL7AXX

XX: 01~99Meter
 01: 01Meter
 02: 02Meters
 ...
 99: 99Meters

Cable Length(L): 01~99Meters

△ Note:

- * @D Important Dimension
- * Waterproof Rate: IP67, mated
- * Connector
 Housing: Thermoplastic, Black
 Pin: Copper Alloy, Gold Plated
 Nut: Metal
 Shell: Metal
 O-Ring: Rubber, Black
- * Cable: UL2464 26AWG*10C+Drain+Al/My,
 PVC Jacket UV Resistant, OD=6.0mm, Black
- * Cable Length Tolerance: 1M~10M±5%mm,
 11M~99M±500mm.

UNIT: mm	
TOLERANCE	±0.5 mm

TITLE 0 CERES, B SHLD-2A, 10P, CABLE W/O SR F, F, MOLDING, SCREW △	
SCALE Free	SHEET 1 OF 1
REV. C	SIZE A4
@D: Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY WUFEI	DATE 2007/09/13
DWG NO BSU-10BFFM-SL7AXX	CHECKED BY TINA	DATE 2007/09/15
CUSTOMER ALTW	APPROVED BY VICTOR	DATE 2007/09/15

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.