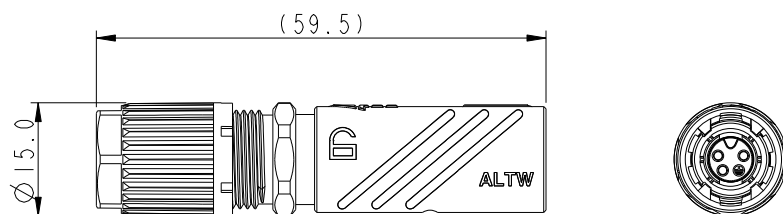

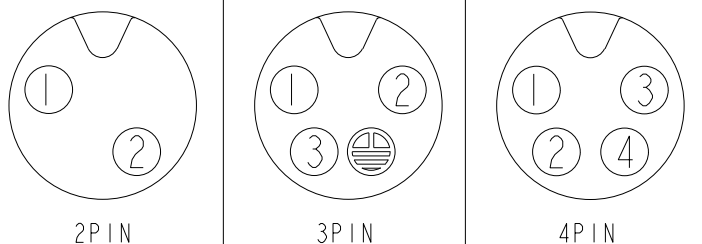




[illegible]

- *  Important Dimension.
- * Waterproof Rate: IP68 (Mating, 1M/24 Hours)
- * Housing: Thermoplastic, Black.
- * Female Pin: Copper Alloy. Gold Plated.
- * Seal: Rubber, Black or Dark Gary.
- * Seal Of Cable OD: $\varnothing 5.5\text{mm} \sim \varnothing 6.0\text{mm}$
- * Seal Nut: Thermoplastic, Black.
- * Gasket: Rubber, Black or Dark Gary.
- * Clamp Ring: Thermoplastic, Black.
- * Holder: Thermoplastic, Black.
- * Seal Nut Torque: 3.0 ~ 5.0 kgf-cm.
- * Rated Voltage: 2 & 3 & 4 Pin 300V
- * Rated Current: 2 & 3 & 4 Pin 5A



Q8D-02BFFA-QL800I	Q8D-03BFFA-QL800I	Q8D-04BFFA-QL800I
-------------------	-------------------	-------------------

Pin Assignments, Front View

UNIT: mm		TITLE HS LOK, Q8-5A, CABLE W/O SR F, F, FI SOLDER, HS LOCK		
TOLERANCE ±0.5 mm		SCALE 1:1	SIZE A4	SHEET 1 OF 1
		REV. A	WC-REV. A.1	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Na Liu	2024/04/10
DWG NO	CHECKED BY	DATE
Q8D-XXBFFA-QL800I	Fisher Wang	2024/04/10
CUSTOMER	APPROVED BY	DATE
ALTW	Fred Lee	2024/04/10