

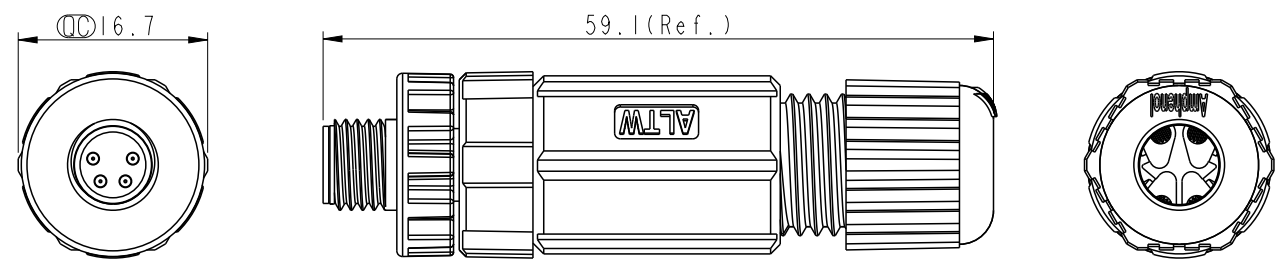


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2023/11/20	Yunchen	Rev.01 to Rev.A
B	C240471	2024/06/14	Sam Ho	$\triangle B$ X2

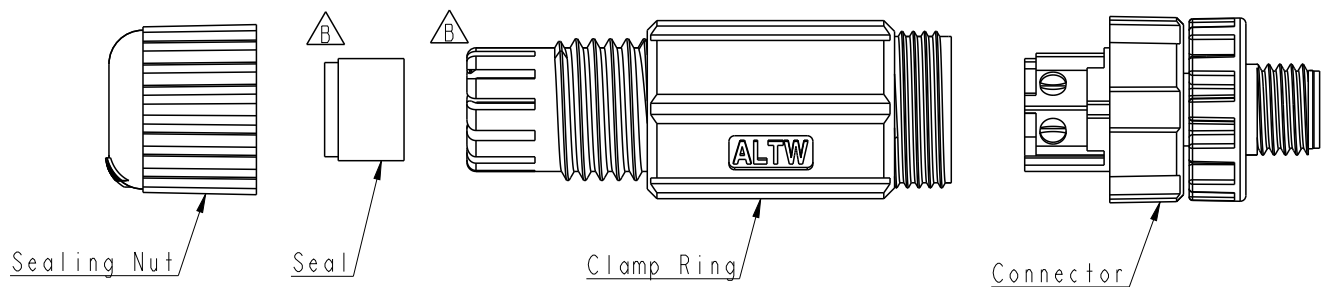

- Note:
- * RoHS Compliant
 - * \varnothing Important Dimension
 - * Waterproof rate: IP67, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Extension Nut: Thermoplastic, Black
 - Nut: Thermoplastic, Black
 - O-Ring: Rubber, Black
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seal: Rubber, Black, OD: $\varnothing 4.5\text{mm} - \varnothing 6.5\text{mm}$
 - * One set unassembled in one pe bag

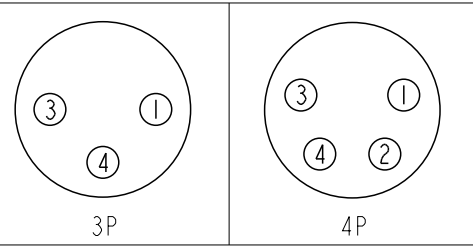

M8P-XXBMMB-SL7001
 XX: No. Of Pin

UNIT: mm TOLERANCE .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLES $\pm 1^\circ$	TITLE N SEN, M8 PLASTIC, SCREW CABLE W/O SR, M, M, FI SCREW IN		<h1 style="text-align: center;">Amphenol LTW</h1> <h2 style="text-align: center;">安費諾亮泰企業股份有限公司</h2>		ITEM NO M8P-XXBMMB-SL7001	DRAWN BY Sam Ho	DATE 2024/06/14
	SCALE 2:1	SIZE A4			SHEET 1 OF 1	DWG NO M8P-XXBMMB-SL7001	CHECKED BY Aric Ko
	REV. B	WC-REV. B.1	\varnothing : Inspection item	CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2024/06/14	