
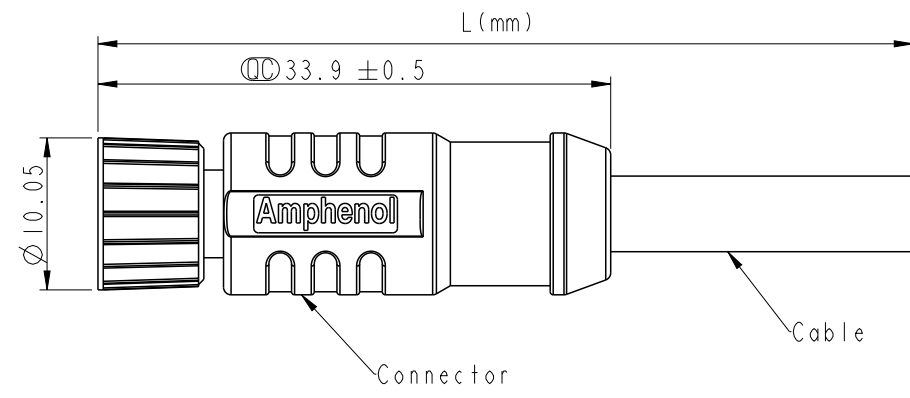


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2023/12/28	Yunchen	Rev.02 to Rev.A

M8-XXBFFM-SL7DXX
 XX: No. Of Pin XX: 01~15Meters
 01: 01Meter
 02: 02Meters
 :
 15: 15Meters



Pin Out	4	Black 黑	4	Black 黑
	3	Blue 藍	3	Blue 藍
	1	Brown 棕	2	White 白
			1	Brown 棕
	Pin #	Wire	Pin #	Wire
Conn.	<p style="text-align: center;">3P</p>		<p style="text-align: center;">4P</p>	

Pin Assignments Front View

Note:
 * RoHS Compliant
 * \varnothing Important dimension
 * Waterproof rate: IP67, mated.
 * Connector
 Housing: Thermoplastic, Black.
 Pin: Copper alloy, Gold plated.
 O-Ring: Rubber, Gray.
 Nut: Metal.
 Outer mold: Thermoplastic, Black.
 * Cable: UL2517, PVC Jacket, Black.
 * Cable length tolerance: 1M: +50/-0 mm
 3M: +100/-0 mm
 5M: +150/-0 mm
 10M: ±100 mm
 20M: ±200 mm
 30M: ±300 mm
 99M: ±500 mm

UNIT:mm		TITLE	N SEN, M8, SCREW CABLE W/O SR, F, F, MOLDING		
TOLERANCE	±0.5mm	SCALE	1:1	SIZE	A4
		REV.	A	WC-REV.	A.5
				\varnothing	Inspection item

<h1 style="margin: 0;">Amphenol LTW</h1> <p style="margin: 0;">安費諾亮泰企業股份有限公司</p>		ITEM NO	DRAWN BY	DATE
		DWG NO	Yunchen	2023/12/28
<p style="margin: 0;">M8-XXBFFM-SL7DXX</p>		CHECKED BY	Neo	DATE
		CUSTOMER	Fred	2023/12/28
		ALTW		