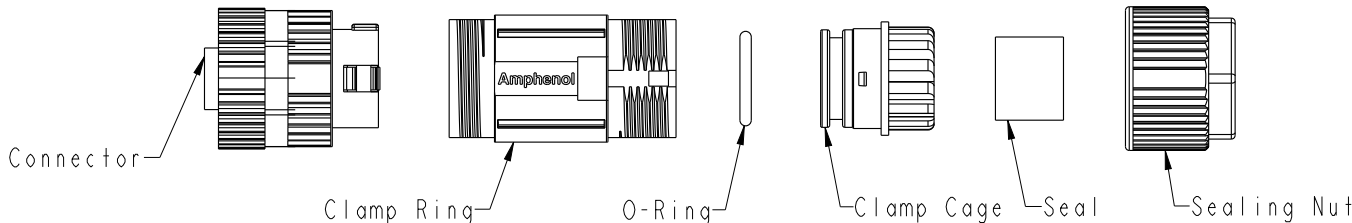
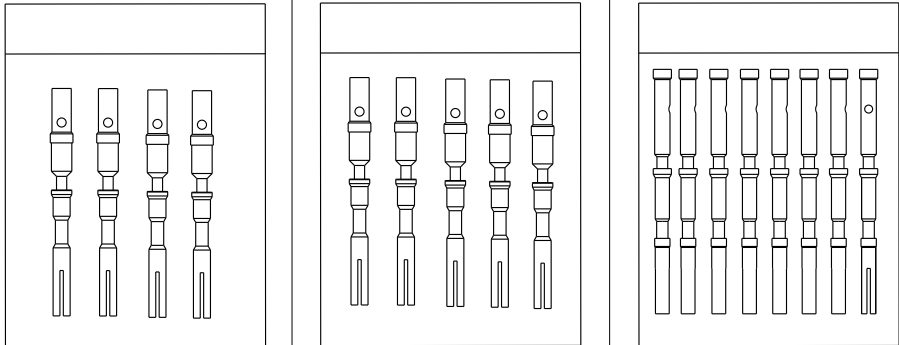
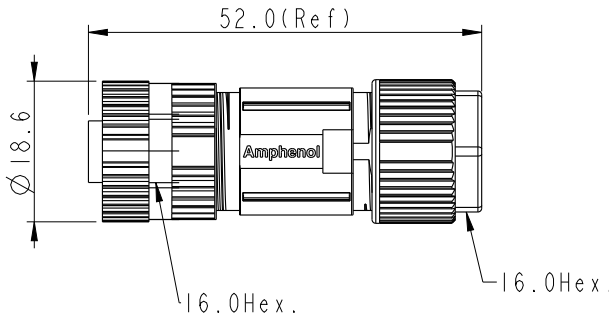
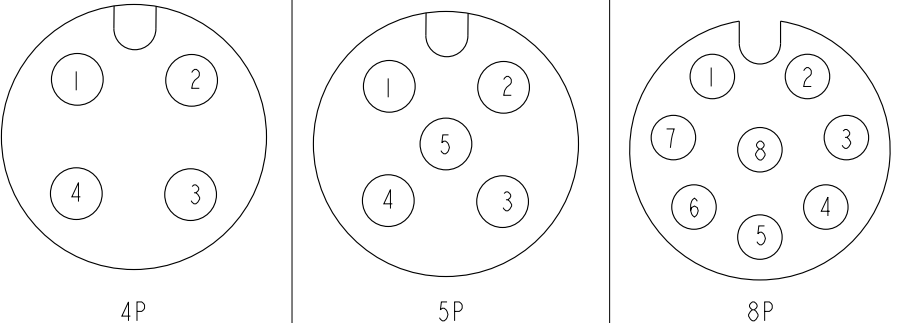


| | | | | | | | | | |
|---|---|--|--------------------|---|---|--------------------|-------------|------------|-------------|
| F | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | |
| | 8P | 22~26 | MSAS-08BFFC-SL7001 | △H | REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
| | 5P | 20~24 | MSAS-05BFFC-SL7001 | | F | C210977 | 2021/06/23 | Vicky | △FX1 |
| | 4P | 20~24 | MSAS-04BFFC-SL7001 | | G | C221877 | 2022/12/09 | Ruru | △GX1 |
| | Contacts | Applicable wire gauge | Item No. | △F | H | C240039 | 2023/11/06 | Xiaofeng | △HX2 |
| E | MSAS-XXBFFC-SL7001 | | | |  | | | | |
| | XX: No. Of Pin | | | | | | | | |
| D |  | | | |  | | | | |
| | PE Bag | | | | Note: * RoHS Compliant * Important Dimension * Waterproof rate: IP67, mated * Connector Housing: Thermoplastic, Black Pin: Copper alloy, Gold plated Extension Nut: Metal Nut: Metal O-Ring: Rubber, Gray * Clamp Ring: Metal * O-Ring: Rubber, Gray * Clamp Cage: Thermoplastic, Black * Sealing Nut: Metal * Seal: Rubber, Gray, OD:Ø4.0mm~Ø7.5mm * One set unassembled in one pe bag | | | | |
| B |  | | | | | | | | |
| | Pin Assignments Front View | | | | | | | | |
| A | UNIT:mm | | | TITLE | | ITEM NO | DRAWN BY | DATE | |
| | TOLERANCE | .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1° | | N SEN, M12 A -SHLD, SCREW CABLE W/O SR, F, F, FI/PANEL CRIMP | | MSAS-XXBFFC-SL7001 | Xiaofeng | 2023/11/06 | |
| | SCALE | Free | SIZE A4 | SHEET 1 | OF 1 | DWG NO | CHECKED BY | DATE | |
| | REV. | H | WC-REV. | .0 | Inspection item | CUSTOMER | APPROVED BY | DATE | |
| | | | | | | ALTW | Jerry | 2023/11/06 | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | |

W10814-03-2001A2

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.