


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2022/02/21	Yuwei Chou	Change Rev.02 To Rev.A
B	C221951	2022/12/19	Ruru	$\triangle B$ X2

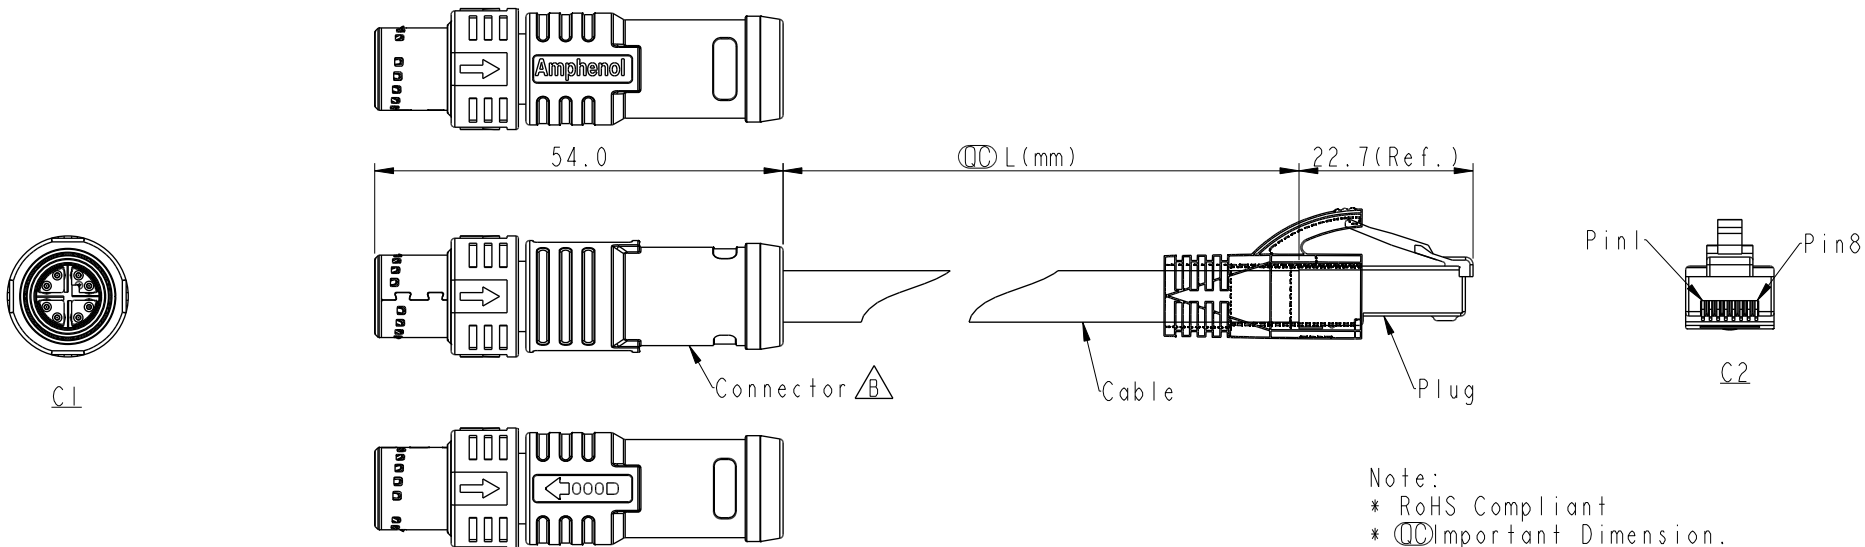


Note:

- \* RoHS Compliant
- \*  $\odot$  Important Dimension.
- \* C1
- $\triangle B$  Waterproof Rate: IP68, Mated 1M/24h
- Housing: Thermoplastic, Black.
- Pin: Copper Alloy, Gold Plated.
- Shield & Shell & Spring: Matel
- Nut: Thermoplastic, Black.
- Outer Mold: Thermoplastic, Black.
- \* C2
- Waterproof Rate: Non-Waterproof
- Plug: RJ45, Shielded
- \* Cable: CAT-6A, 26#\*4P+AL/MY+B
- TPU Jacket, OD=6.8, Green.
- \* Cable Length Tolerance:
- 0.5M < L  $\leq$  1M: +60/-0 mm
- 1M < L  $\leq$  3M: +120/-0 mm
- 3M < L  $\leq$  5M: +160/-0 mm
- 5M < L  $\leq$  10M:  $\pm$ 100 mm
- 10M < L  $\leq$  20M:  $\pm$ 200 mm
- 20M < L  $\leq$  30M:  $\pm$ 300 mm
- 30M < L  $\leq$  40M:  $\pm$ 500 mm

MSXSXXML-SPBML-PXXXX

XX: No. Of Pin

XXX: 0.5-40Meters  
A05: 0.5Meter  
001: 01Meter  
002: 02Meter  
:  
:  
040: 40Meters



Shield	Braid	編織	Shield	
6	Brown	棕	8	Twist
5	White/Brown	白/棕	7	Twist
4	Green	綠	6	Twist
3	White/Green	白/綠	3	Twist
8	Blue	藍	4	Twist
7	White/Blue	白/藍	5	Twist
2	Orange	橘	2	Twist
1	White/Orange	白/橘	1	
C1	Wire Color	白/橘	C2	

UNIT:mm TOLERANCE $\pm 0.5$ mm	TITLE ACC, SEN, X Code, M12 TO RJ MM		<b>Amphenol LTW</b> 安費諾亮泰企業股份有限公司		ITEM NO MSXSXXML-SPBML-PXXXX	DRAWN BY Yuwei Chou	DATE 2022-02-21
	SCALE Free	SIZE A4			SHEET 1 OF 1	CHECKED BY Aric Ko	DATE 2022-02-21
	REV. B	WC-REV. A.1	$\odot$ : Inspection item	CUSTOMER ALTW	APPROVED BY Max Yang	DATE 2022-02-21	