


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2024/01/20	Cherry	Initial Released
B	C240325	2024/03/27	Cherry	△B X2

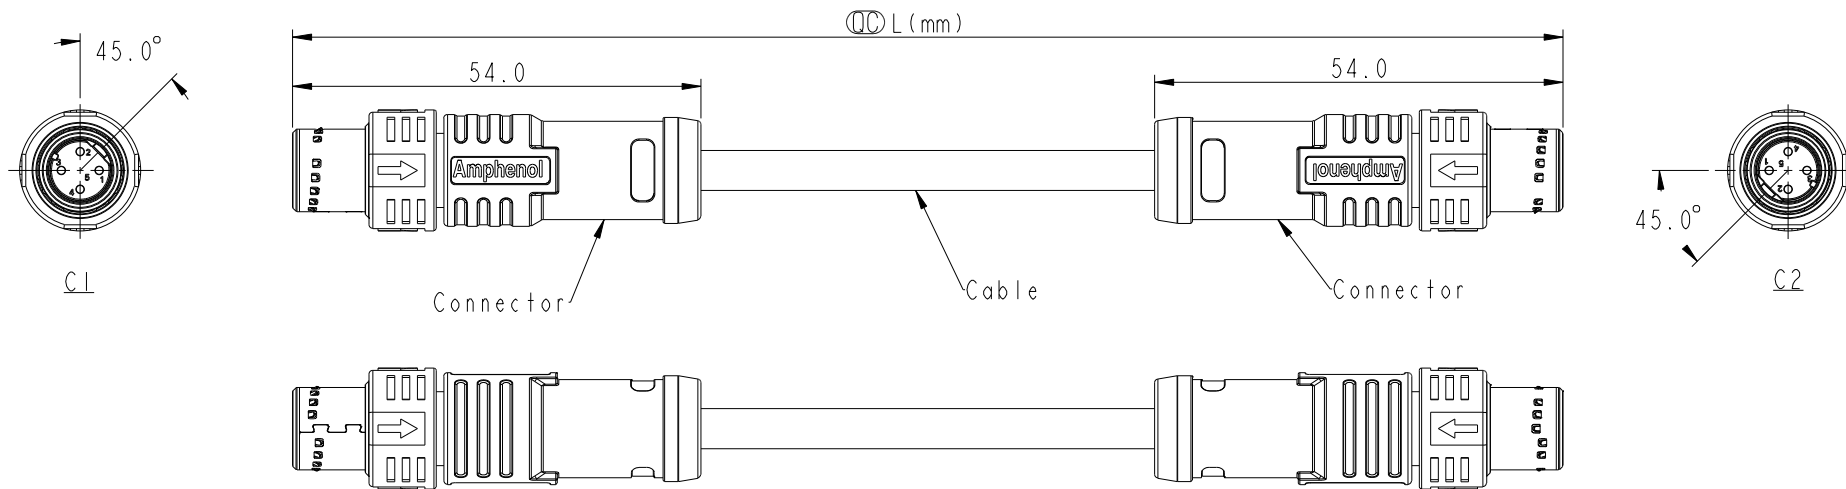

Pin Out	5	Shield	黑 藍 白 棕
	4	--	
	3	Black	
	2	Blue	
	1	White	
	Pin #	Wire	
C1 & C2			
	4P		

△B MSDSXXXML-SDSML-PDXXX  
 XX: No. Of pin  
 XXX: 0.5~99 Meters  
 A05: 0.5 Meters  
 1: 01 Meters  
 2: 02 Meters  
 ...  
 99: 99 Meters

Note:  
 \* RoHS Compliant  
 \*  $\varnothing$  Important dimension  
 \* Waterproof rate: IP68, mated 1m/24h  
 \* Connector:  
 Housing: Thermoplastic, Black  
 Pin: Copper alloy, Gold plated  
 Nut: Metal  
 Shield: Metal  
 Outer mold: Thermoplastic, Black  
 \* Cable: UL2517, 22#\*4C+AL/MY+B, OD=5.3mm,  
 PVC Jacket, Black  
 △B \* Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm  
 1M < L ≤ 3M: +120/-0 mm  
 3 M < L ≤ 5M: +160/-0 mm  
 5 M < L ≤ 10M: ±100 mm  
 10 M < L ≤ 20M: ±200 mm  
 20 M < L ≤ 30M: ±300 mm  
 30 M < L ≤ 99M: ±500 mm

UNIT:mm TOLERANCE ± 0.5mm	TITLE ACC, SEN, D Code, DB-ENDED MM		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Cherry Huang	DATE 2024/03/27
	SCALE 1:1	SIZE A4			SHEET 1	OF 1	DWG NO MSDSXXXML-SDSML-PDXXX
	REV. B	WC-REV. A	$\varnothing$ : Inspection item		CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2024/03/27