

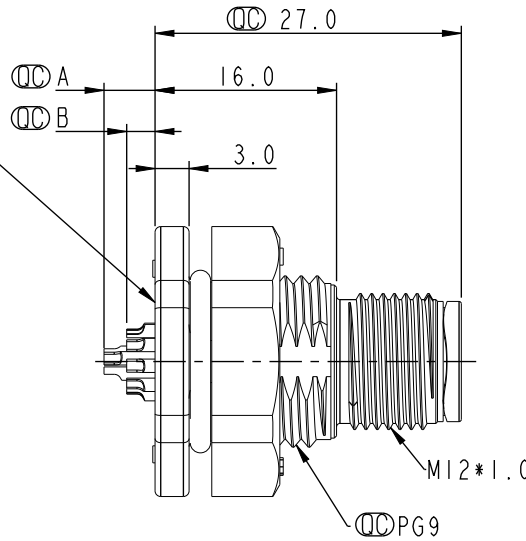
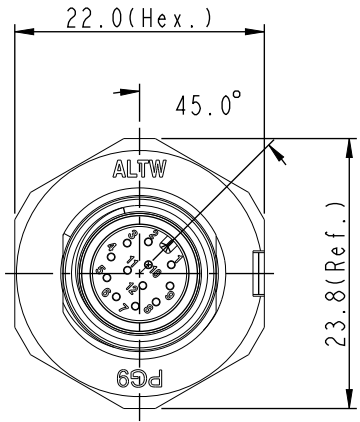








		2	3	4	5	6	7	8	
<div><div>(PG9)</div><div></div><div>Recommended Panel Cut-Out</div></div>				REV.		ECN NO.	DATE	SIGN	DESCRIPTION
				A			2024/04/23	Hubert	Rev.01 to Rev.A
<div>MSAP-XXPMMS-SF800I</div> <div>XX: No. Of Pin</div> <div>With Liquid Glue</div> <div></div>				<div></div>		<div></div>			
MSAP-03PMMS-SF800I			2.5	<div>Note:</div> <div>* RoHS Compliant</div> <div>*  Important dimension</div> <div>* Waterproof rate: IP68, unmated 1m/24h IP69K, mated</div> <div>* Connector</div> <div>Housing: Thermoplastic, Black</div> <div>Pin: Copper alloy, Gold plated</div> <div>* Shield: Thermoplastic, Black</div> <div>* Nut: Thermoplastic, Black</div> <div>* O-Ring: Rubber, Black</div> <div>* For panel thickness max: 4.0mm</div> <div>* Nut is packed separately in pe bag</div>					
MSAP-04PMMS-SF800I			2.5						
MSAP-05PMMS-SF800I			2.5						
MSAP-06PMMS-SF800I			2.5						
MSAP-08PMMS-SF800I			2.5						
MSAP-10PMMS-SF800I		4.5	2.5						
MSAP-12PMMS-SF800I		4.5	2.5						
Item No.		A	B						
		Pin伸出長度							
									
3P		4P		5P		6P		8P	