








THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C231273	2023/10/11	Ruru	$\triangle B$ X5

$\triangle B$
ABB-XXBMMC-LL7XP0

XX: No. Of Pin

- A: With Red&Yellow&Blue Color Seal
- S: With Red Color Seal, Cable OD 5.0~6.0mm.
- M: With Yellow Color Seal, Cable OD 6.0~8.0mm.
- L: With Blue Color Seal, Cable OD 8.0~10.0mm.

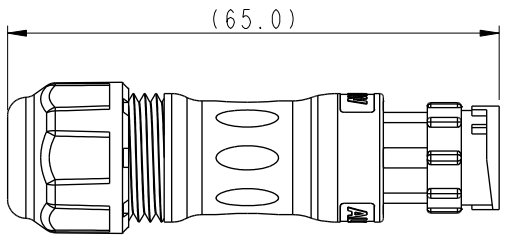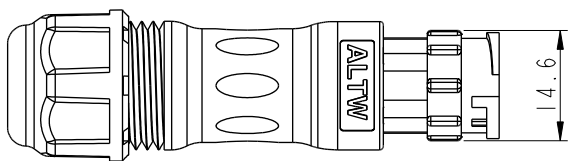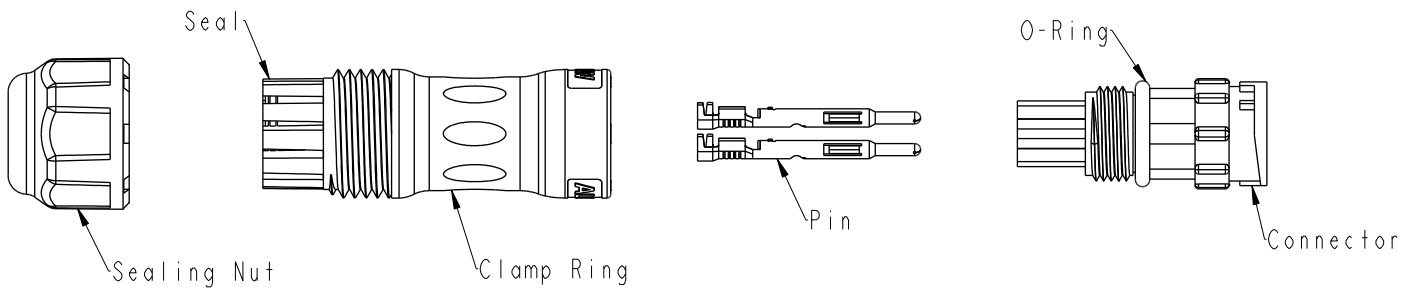

2P 3P 4P

Pin Assignments Front View

- $\triangle B$ Note:
- * RoHS Compliant
 - * \varnothing Important dimension
 - * Waterproof rate: IP67, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Thermoplastic, Black
 - O-Ring: Rubber, Dark gray
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Sealing : Rubber
 - * One set unassembled in one pe bag

UNIT:mm		TITLE
TOLERANCE	± 0.5 mm	N CERES, ST, B-10A, CABLE W/O SR M, M, CRIMP, 2LOCK
SCALE	8:5	SIZE
REV.	B	WC-REV.
		A.3
		\varnothing Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Peng	2018-12-15
DWG NO	CHECKED BY	DATE
$\triangle B$ ABB-XXBMMC-LL7XP0	Mafei	2018-12-15
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2018-12-15