






THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C231273	2023/10/05	Ruru	X5

**B**  
ADD-XXBMFC-LL7XP0

XX: No. Of Pin

A: With Red&Yellow&Blue Color Seal  
 S: With Red Color Seal, Cable OD 8.0~10.0mm.  
 M: With Yellow Color Seal, Cable OD 10.0~12.0mm.  
 L: With Blue Color Seal, Cable OD 12.0~14.0mm.

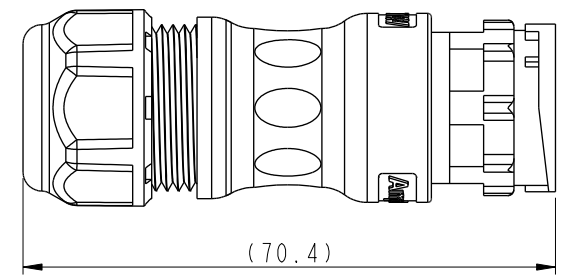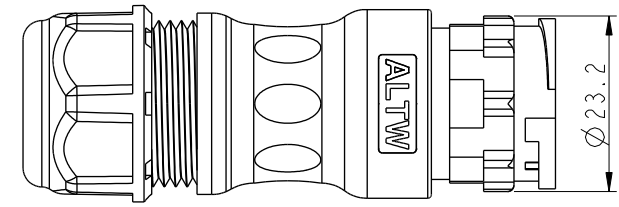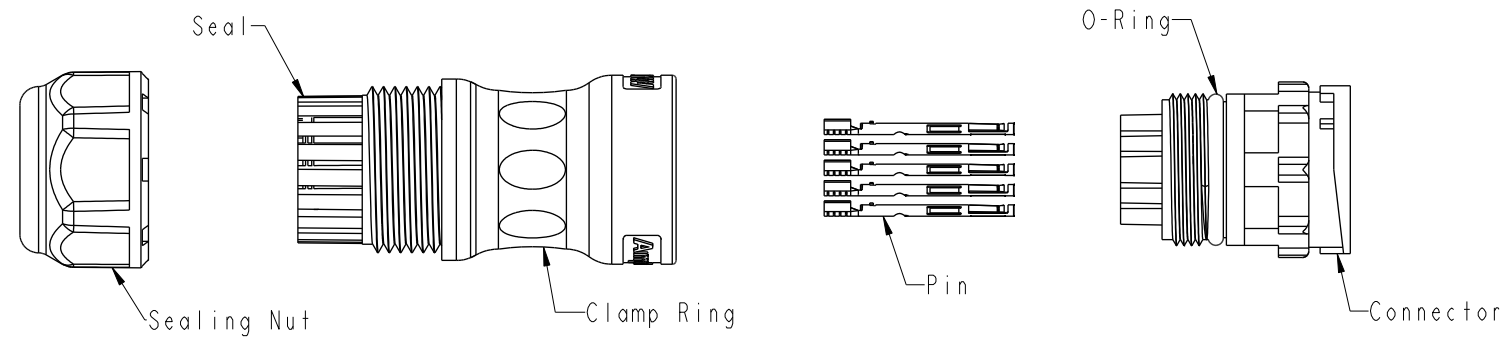

Pin Assignments  
Front View

- B** Note:
- \* RoHS Compliant
  - \*  $\varnothing$  Important dimension
  - \* Waterproof rate: IP67, mated
  - \* Connector
  - Housing: Thermoplastic, Black
  - Pin: Copper alloy, Gold plated
  - O-Ring: Rubber, Dark gray
  - \* Clamp Ring: Thermoplastic, Black
  - \* Sealing Nut: Thermoplastic, Black
  - \* Sealing : Rubber
  - \* One set unassembled in one pe bag

UNIT:mm		
TOLERANCE		
±0.5 mm		

TITLE N CERES, ST, D-5A, CABLE W/O SR M, F, CRIMP, 2LOCK <b>B</b>			
SCALE 8:5	SIZE A4	SHEET 1 OF 1 <b>B</b>	
REV. B	WC-REV. A.3	<b>QC</b> : Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Peng	DATE 2018-12-15
DWG NO <b>B</b> ADD-XXBMFC-LL7XP0	CHECKED BY Mafei	DATE 2018-12-15
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2018-12-15