






THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|------|---------|------------|------|-------------|
| B | C231273 | 2023/10/05 | Ruru | X5 |
| | | | | |
| | | | | |

B
ADCD-XXBMEC-LL7XP0

XX: No. Of Pin

- A: With Red&Yellow&Blue Color Seal
- S: With Red Color Seal, Cable OD 8.0~10.0mm.
- M: With Yellow Color Seal, Cable OD 10.0~12.0mm.
- L: With Blue Color Seal, Cable OD 12.0~14.0mm.

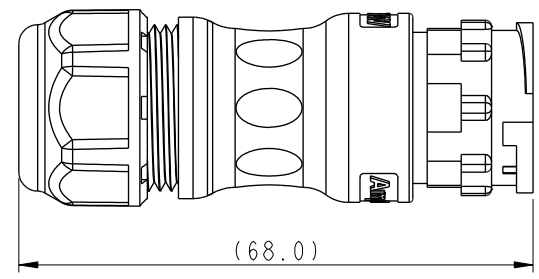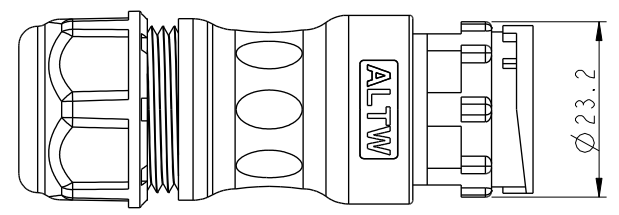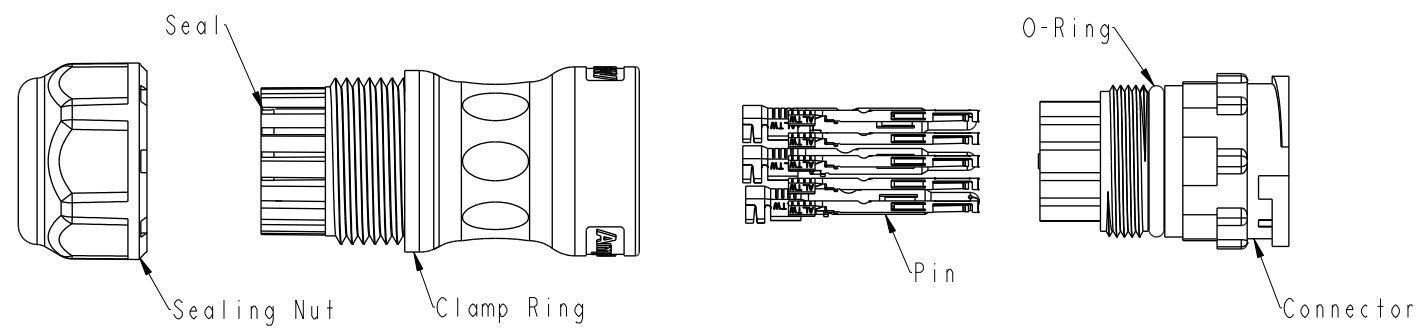

Pin Assignments
Front View

- B** Note:
- * RoHS Compliant
 - * ϕ Important dimension
 - * Waterproof rate: IP67, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Dark gray
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Sealing : Rubber
 - * One set unassembled in one pe bag

| | | |
|-----------|--|--|
| UNIT:mm | | |
| TOLERANCE | | |
| ±0.5 mm | | |

| | | | |
|---|----------------|--------------------------|--|
| TITLE N CERES, ST, D-20A+5A, CABLE W/O SR M, M PWR+F SIG, CRIMP, 2LOCK B | | | |
| SCALE 8:5 | SIZE A4 | SHEET 1 OF 1 B | |
| REV. B | WC-REV. A.3 | QC: Inspection item | |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | |
|----------|-----------------------------|
| ITEM NO | DWG NO |
| | B ADCD-XXBMEC-LL7XP0 |
| CUSTOMER | |
| | ALTW |

| | |
|-------------|------------|
| DRAWN BY | CHECKED BY |
| Peng | Mafei |
| APPROVED BY | |
| Jerry | |

| | |
|------------|------------|
| DATE | DATE |
| 2018-12-15 | 2018-12-15 |
| DATE | DATE |
| 2018-12-15 | 2018-12-15 |