

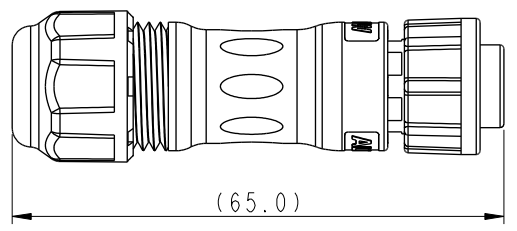
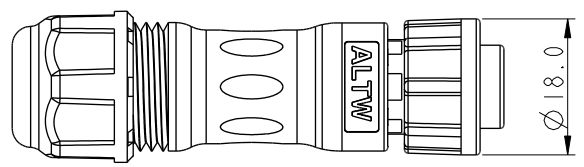


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C231273	2023/10/06	Ruru	△ X6

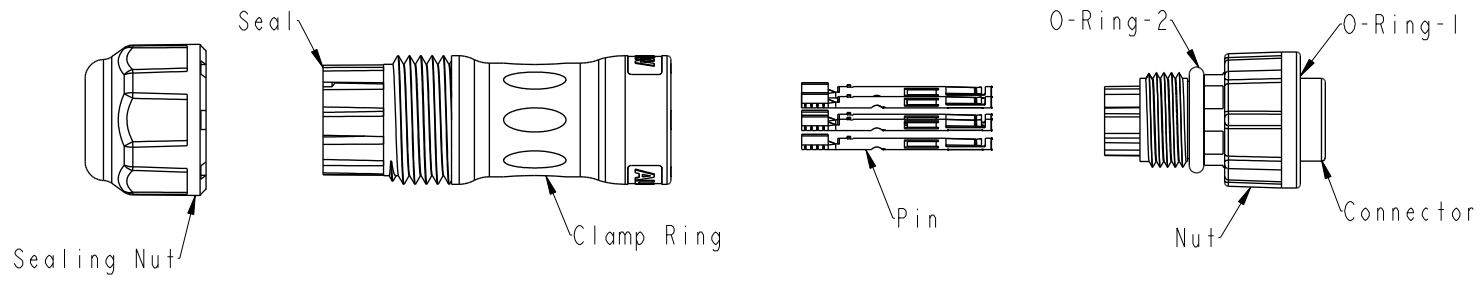

- △ Note:
- \* RoHS Compliant
  - \* Important dimension
  - \* Waterproof rate: IP67, mated
  - \* Connector
    - Housing: Thermoplastic, Black
    - Pin: Copper alloy, Gold plated
    - Nut: Thermoplastic, Black
    - O-Ring-1: Rubber, Gray
    - O-Ring-2: Rubber, Dark gray
  - \* Clamp Ring: Thermoplastic, Black
  - \* Sealing Nut: Thermoplastic, Black
  - \* Sealing : Rubber
  - \* One set unassembled in one pe bag

UNIT:mm			TITLE N CERES, ST, B-5A, CABLE W/O SR F, F, CRIMP, 2LOCK
TOLERANCE ±0.5 mm		SCALE 8:5	SIZE A4
REV. B	WC-REV. A.3	SHEET 1	OF 2
			QC: Inspection item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司


ITEM NO	DRAWN BY Peng	DATE 2018-12-15
DWG NO △ ABD-XXBFFC-LL7XP0	CHECKED BY Mafei	DATE 2018-12-15
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2018-12-15

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


△  
ABD-XXBFFC-LL7XP0

XX: No. Of Pin

- A: With Red&Yellow&Blue Color Seal
- S: With Red Color Seal, Cable OD 5.0~6.0mm.
- M: With Yellow Color Seal, Cable OD 6.0~8.0mm.
- L: With Blue Color Seal, Cable OD 8.0~10.0mm.

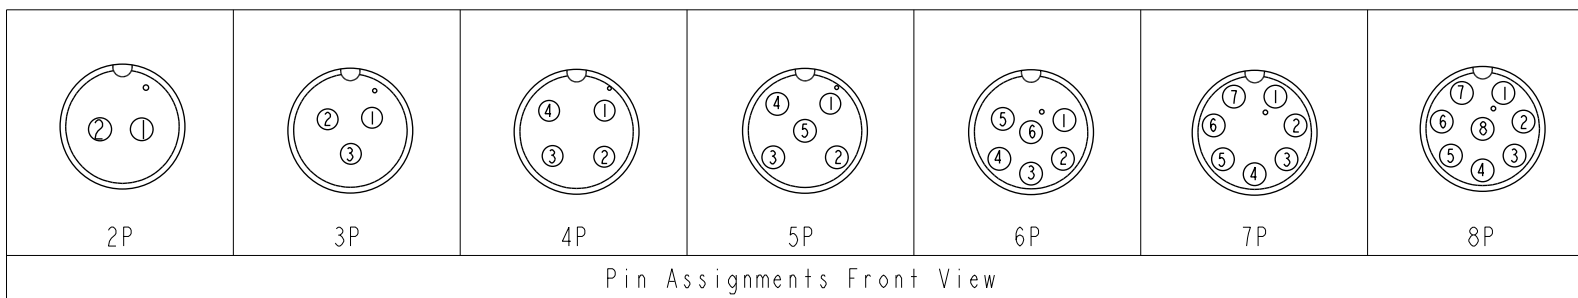

UNIT:mm  
TOLERANCE



TITLE N CERES, ST, B-5A, CABLE W/O SR F, F, CRIMP, 2LOCK			
SCALE 1:1	SIZE A4	SHEET 2 OF 2	
REV. B	WC-REV. .0	QC: Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Peng	DATE 2018-12-15
DWG NO △ ABD-XXBFFC-LL7XP0	CHECKED BY Mafei	DATE 2018-12-15
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2018-12-15