

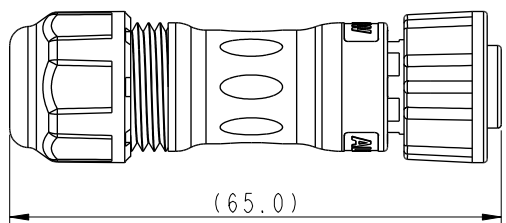
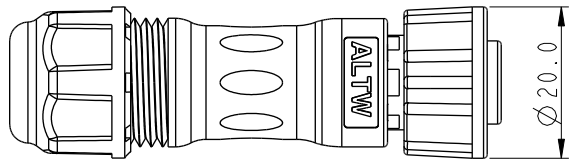


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C231273	2023/10/11	Ruru	$\triangle B$ X6

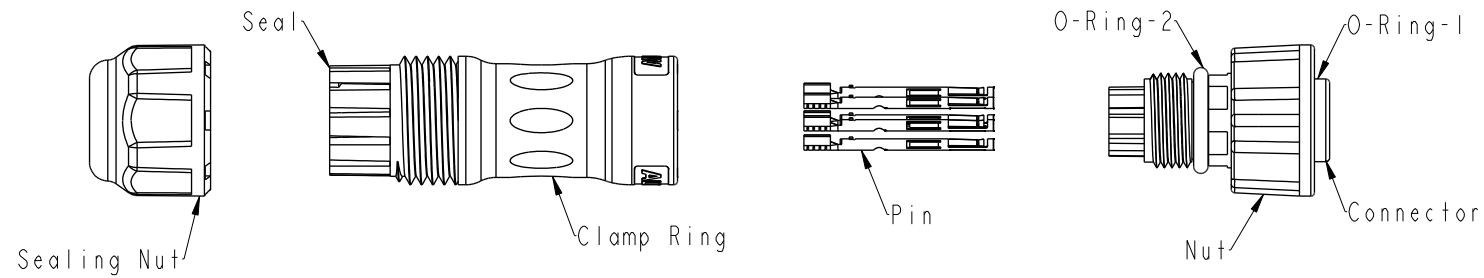

- $\triangle B$ Note:
- * RoHS Compliant
 - * \varnothing Important dimension
 - * Waterproof rate: IP67, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Thermoplastic, Black
 - O-Ring-1: Rubber, Gray
 - O-Ring-2: Rubber, Dark gray
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Sealing : Rubber
 - * One set unassembled in one pe bag

UNIT:mm		TITLE
TOLERANCE	± 0.5 mm	N CERES, ST, B-5A, CABLE W/O SR F, F, CRIMP, SCREW
SCALE	8:5	SIZE
REV.	B	A4
WC-REV.	A.3	SHEET
		1 OF 2
		\varnothing : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司


ITEM NO	DRAWN BY	DATE
	Peng	2018-08-06
DWG NO	CHECKED BY	DATE
$\triangle B$ ABD-XXBFFC-SL7XP0	Mafei	2018-08-06
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2018-08-06

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


△
ABD-XXBFFC-SL7XP0

XX: No. Of Pin

- A: With Red&Yellow&Blue Color Seal
- S: With Red Color Seal, Cable OD 5.0~6.0mm.
- M: With Yellow Color Seal, Cable OD 6.0~8.0mm.
- L: With Blue Color Seal, Cable OD 8.0~10.0mm.

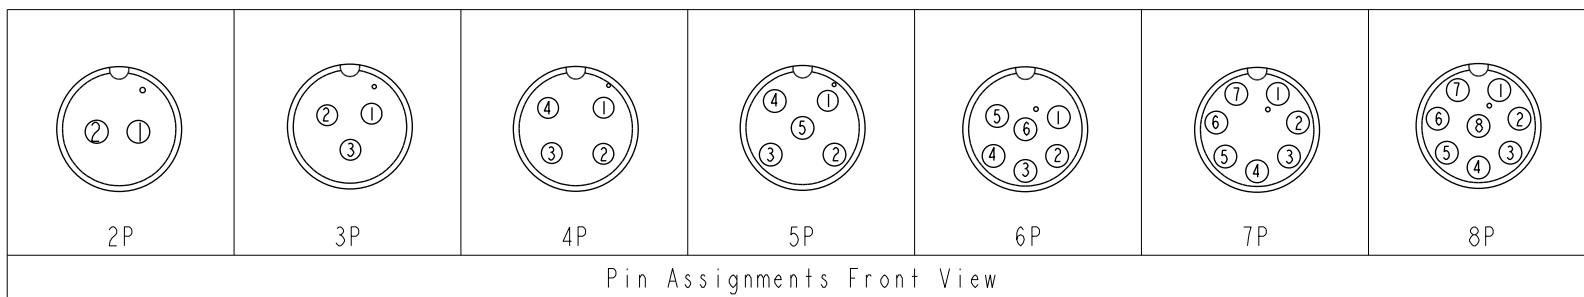

UNIT:mm
TOLERANCE



TITLE N CERES, ST, B-5A, CABLE W/O SR F, F, CRIMP, SCREW			
SCALE 1:1	SIZE A4	SHEET 2 OF 2	
REV. B	WC-REV. .0	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO △ ABD-XXBFFC-SL7XP0
CUSTOMER ALTW	

DRAWN BY Peng	CHECKED BY Mafei
APPROVED BY Jerry	

DATE 2018-08-06	DATE 2018-08-06
DATE 2018-08-06	