
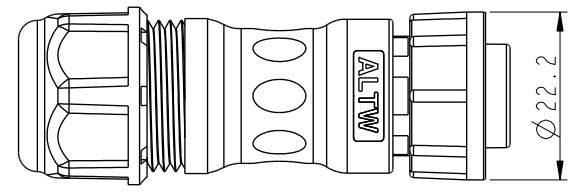





THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C231272	2023/10/05	Vicky	△B X4

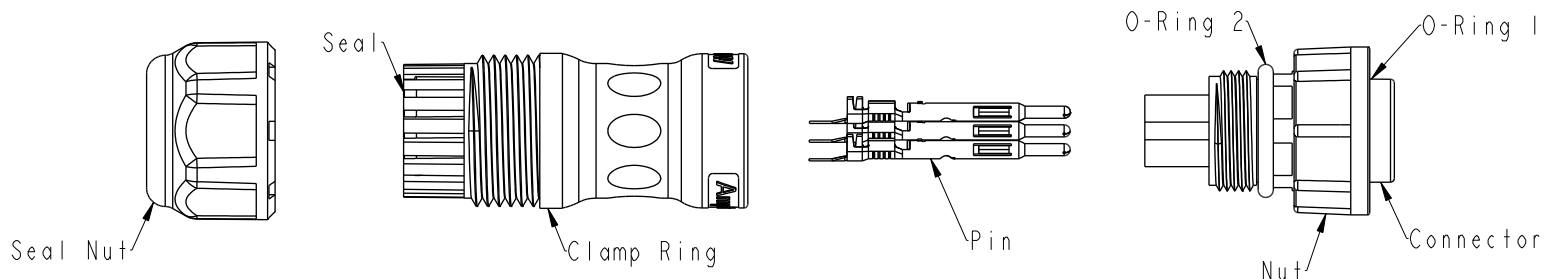

△B ACB-XXBFMC-LL7XP0  
 XX: No. Of Pin

- S: With Red Color Seal 1, Cable OD 6.0~8.0mm
- M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm
- L: With Blue Color Seal 3, Cable OD 10.0~12.0mm
- A: With Seal 1 & Seal 2 & Seal 3

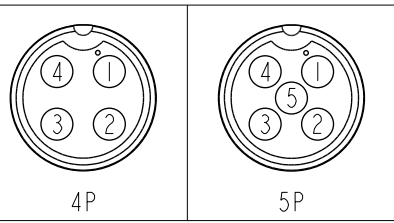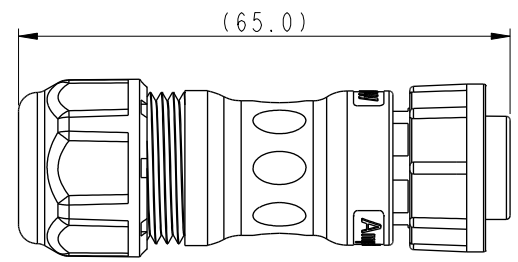

Pin Assignments Front View

- △B Note:
- \* RoHS Compliant
  - \* ⌀ Important dimension
  - \* Waterproof rate: IP67, mated
  - \* Connector
    - Housing: Thermoplastic, Black
    - Pin: Copper Alloy, Gold plated
    - Nut: Thermoplastic, Black
    - O-Ring 1: Rubber, Gray
    - O-Ring 2: Rubber, Dark gray
  - \* Clamp Ring: Thermoplastic, Black
  - \* Sealing Nut: Thermoplastic, Black
  - \* Seal: Rubber
  - \* One set unassembled in one pe bag

UNIT:mm		TITLE
TOLERANCE	$\pm 0.5$ mm	N CERES, ST, C-10A, CABLE W/O SR F, M, CRIMP, 2LOCK
SCALE	8:5	SIZE A4
REV.	B	WC-REV. A.3
		Ⓞ: Inspection item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Peng	2018-12-15
DWG NO	CHECKED BY	DATE
△B ACB-XXBFMC-LL7XP0	Mafei	2018-12-15
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2018-12-15