
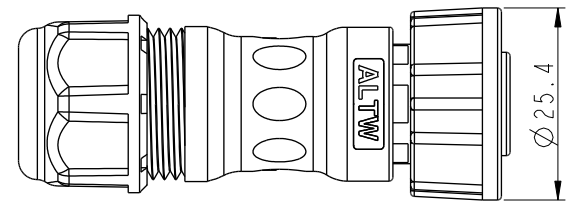




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

| REV. | ECN NO. | DATE       | SIGN  | DESCRIPTION |
|------|---------|------------|-------|-------------|
| B    | C231272 | 2023/10/05 | Vicky | △B X4       |
|      |         |            |       |             |

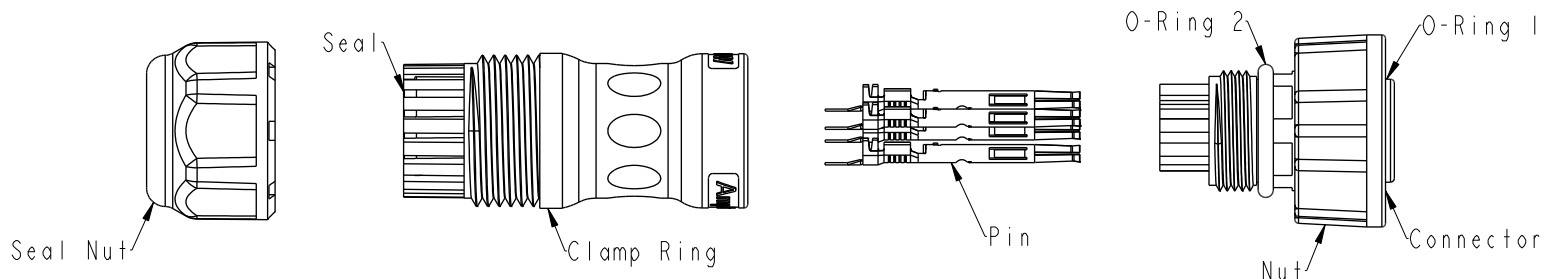


△B ACB-XXBFFC-SL7XP0  
 XX: No. Of Pin

- S: With Red Color Seal 1, Cable OD 6.0~8.0mm
- M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm
- L: With Blue Color Seal 3, Cable OD 10.0~12.0mm
- A: With Seal 1 & Seal 2 & Seal 3

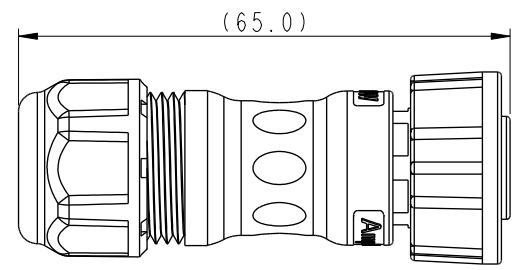

- △B Note:
- \* RoHS Compliant
  - \* ⌀ Important dimension
  - \* Waterproof rate: IP67, mated
  - \* Connector
  - Housing: Thermoplastic, Black
  - Pin: Copper Alloy, Gold plated
  - Nut: Thermoplastic, Black
  - O-Ring 1: Rubber, Gray
  - O-Ring 2: Rubber, Dark gray
  - \* Clamp Ring: Thermoplastic, Black
  - \* Sealing Nut: Thermoplastic, Black
  - \* Seal: Rubber
  - \* One set unassembled in one pe bag

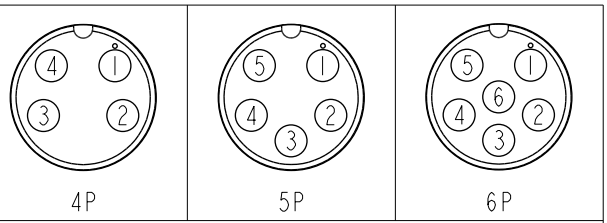

Pin Assignments Front View

|           |              |  |
|-----------|--------------|--|
| UNIT:mm   |              | TITLE  |
| TOLERANCE | $\pm 0.5$ mm | N CERES, ST, C-10A, CABLE W/O SR<br>F, F, CRIMP, SCREW |
| SCALE     | 8:5          | SIZE   |
| REV.      | B            | WC-REV.  |
|           |              | WC-REV.  |
|           |              | QC: Inspection item                                    |

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

|                      |             |            |
|----------------------|-------------|------------|
| ITEM NO              | DRAWN BY    | DATE       |
|                      | Peng        | 2018-12-15 |
| DWG NO               | CHECKED BY  | DATE       |
| △B ACB-XXBFFC-SL7XP0 | Mafei       | 2018-12-15 |
| CUSTOMER             | APPROVED BY | DATE       |
| ALTW                 | Jerry       | 2018-12-15 |