

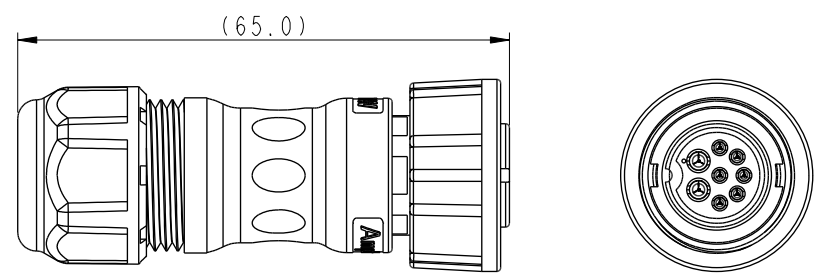
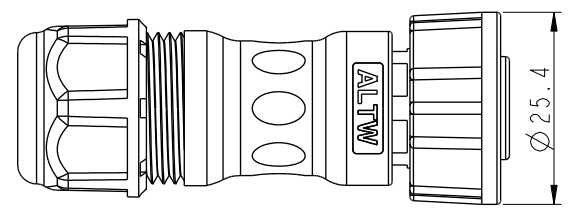


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C231272	2023/10/03	Vicky	△ X4

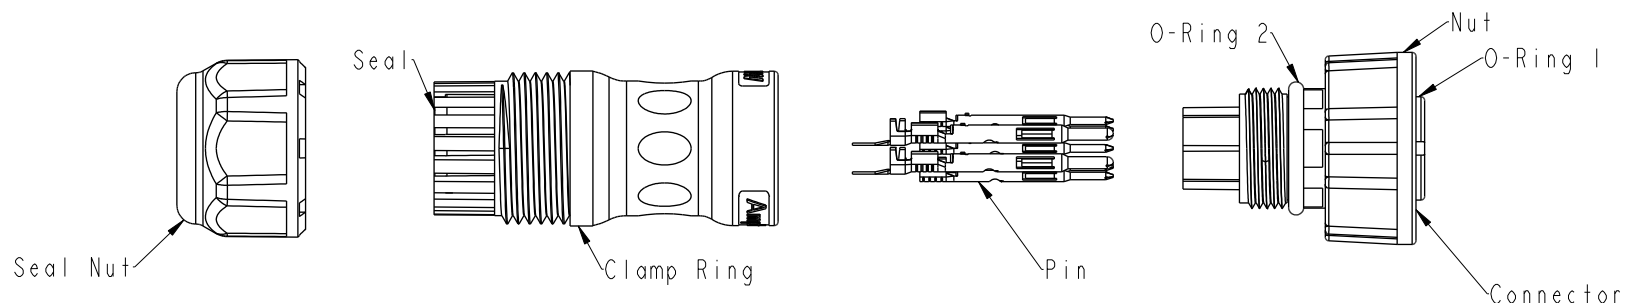

Pin Assignments Front View

△ B ACBD-XXBFMC-SL7XP0
XX: No. Of Pin

- S: With Red Color Seal 1, Cable OD 6.0~8.0mm
- M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm
- L: With Blue Color Seal 3, Cable OD 10.0~12.0mm
- A: With Seal 1 & Seal 2 & Seal 3

- △ B Note:
- * RoHS Compliant
 - * Ⓞ Important dimension
 - * Waterproof rate: IP67, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Gold plated
 - Nut: Thermoplastic, Black
 - O-Ring 1: Rubber, Gray
 - O-Ring 2: Rubber, Dark gray
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seal: Rubber
 - * One set unassembled in one pe bag

UNIT:mm		TITLE
TOLERANCE		N CERES, ST, C-10A+5A, CABLE W/O SR F, M, CRIMP, SCREW △ B
±0.5 mm		SCALE 8:5 SIZE A4 SHEET 1 OF 1
		REV. B WC-REV. A.3 Ⓞ Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Peng	2018-12-15
DWG NO	CHECKED BY	DATE
△ B ACBD-XXBFMC-SL7XP0	Mafei	2018-12-15
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2018-12-15