


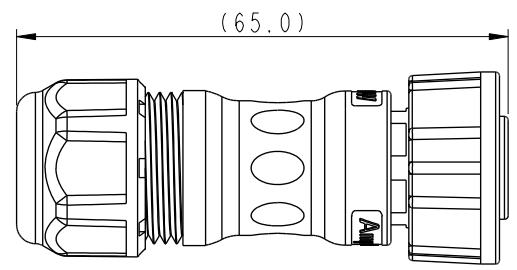
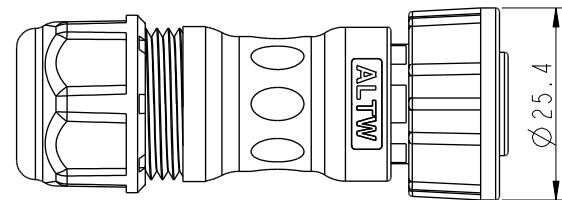


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C231272	2023/10/05	Vicky	X4

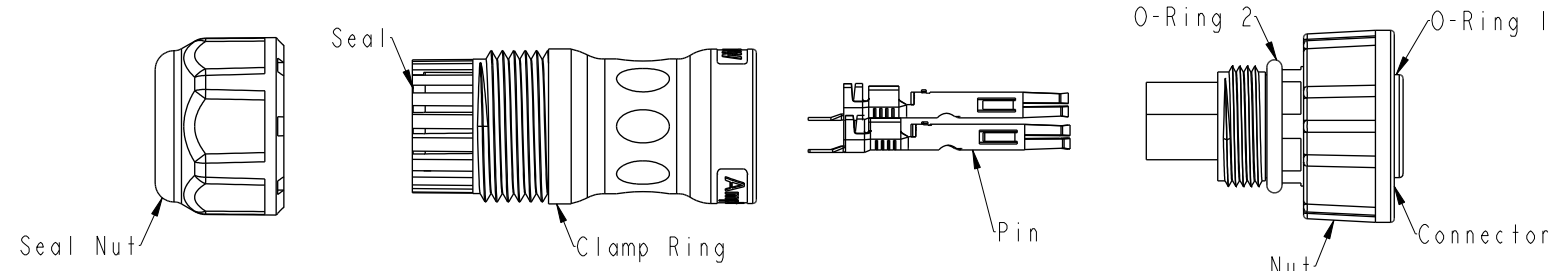

Pin Assignments Front View

△ ACC-XXBFFC-SL7XP0
 XX: No. Of Pin

- S: With Red Color Seal 1, Cable OD 6.0~8.0mm
- M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm
- L: With Blue Color Seal 3, Cable OD 10.0~12.0mm
- A: With Seal 1 & Seal 2 & Seal 3

- △ Note:
- * RoHS Compliant
 - * Ⓞ Important dimension
 - * Waterproof rate: IP67, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Gold plated
 - Nut: Thermoplastic, Black
 - O-Ring 1: Rubber, Gray
 - O-Ring 2: Rubber, Dark gray
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seal: Rubber
 - * One set unassembled in one pe bag

A	UNIT:mm	TITLE N CERES, ST, C-20A, CABLE W/O SR F, F, CRIMP, SCREW		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY	DATE
	TOLERANCE ±0.5 mm	SCALE 8:5	SIZE A4			SHEET 1 OF 1	ACC-XXBFFC-SL7XP0	Peng
	REV. B	WC-REV. A.3	QC: Inspection item		CUSTOMER ALTW	CHECKED BY Mafei	DATE 2018-12-15	APPROVED BY Jerry