
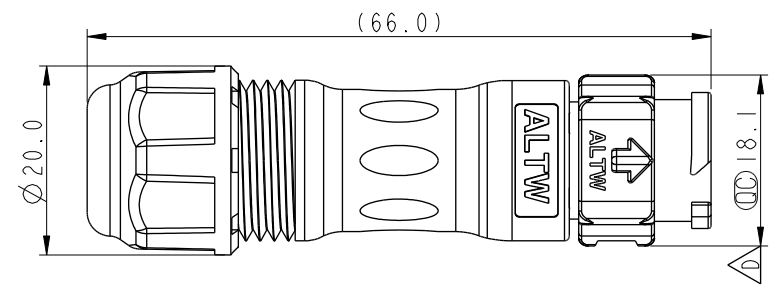



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C191760	2019/10/15	Jane	X5
D	C192018	2019/11/15	Vicky	X4
E	C231240	2023/09/22	Ruru	X2

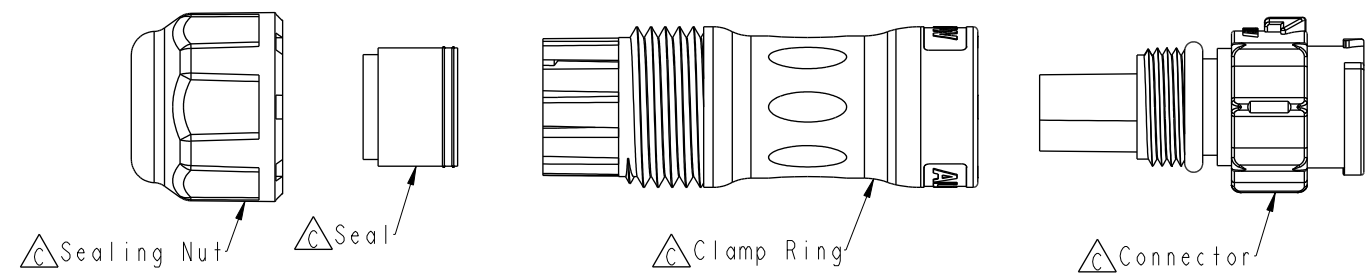


BB-XXBMFA-QL8XPP
 XX: No. Of Pin


- S: With Red Color Seal 1, Cable OD 5.0~6.0mm.
- M: With Yellow Color Seal 2, Cable OD 6.0~8.0mm.
- L: With Blue Color Seal 3, Cable OD 8.0~10.0mm.
- A: With Seal 1 & Seal 2 & Seal 3.

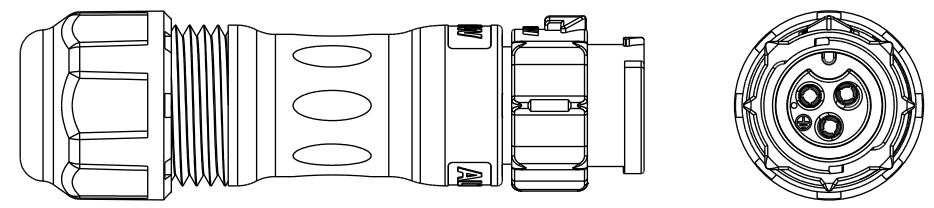

Pin Assignments Front View



2 Pin



3 Pin

- Note:
- * Important Dimension
 - * Waterproof Rate: IP68, mated 1m/24h
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seals: Rubber
 - * One set unassembled in one pe bag

UNIT:mm			TITLE
TOLERANCE			XLOK, B-10A, CABLE W/O SR M, F, FI CRIMP, XLOK
±0.5mm	SCALE 1:1	SIZE A4	SHEET 1 OF 1
	REV. E	WC-REV. A.5	Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Brady Chung	2019-09-24
DWG NO	CHECKED BY	DATE
BB-XXBMFA-QL8XPP	Jane Wang	2019-09-24
CUSTOMER	APPROVED BY	DATE
ALTW	Neo Tsai	2019-09-24