

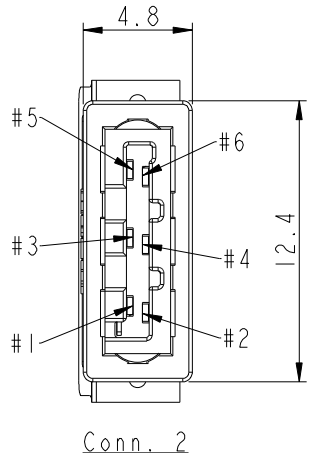
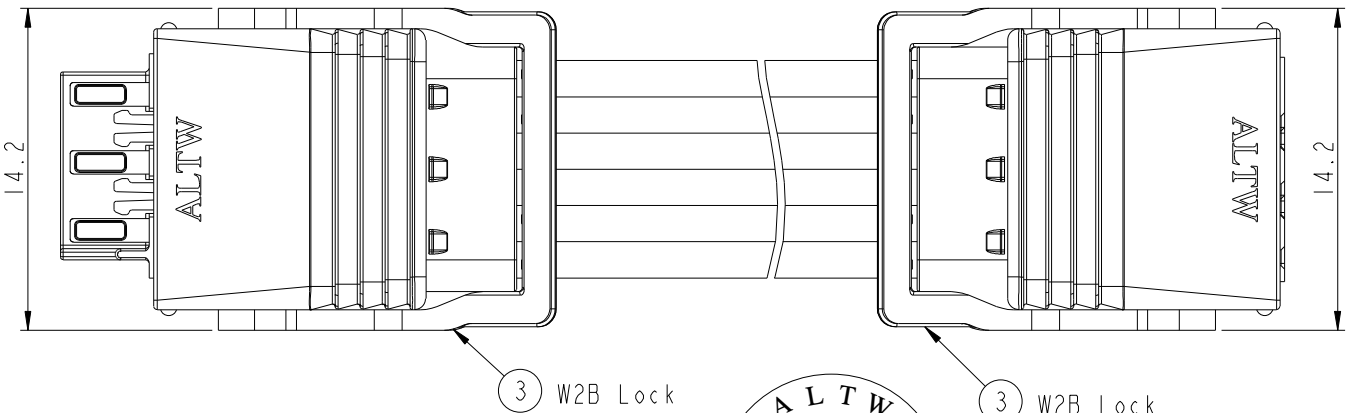
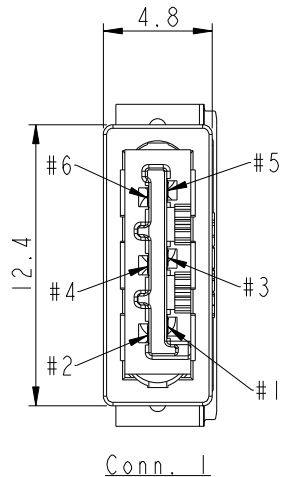


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-02-12	Fisher	Initial Release

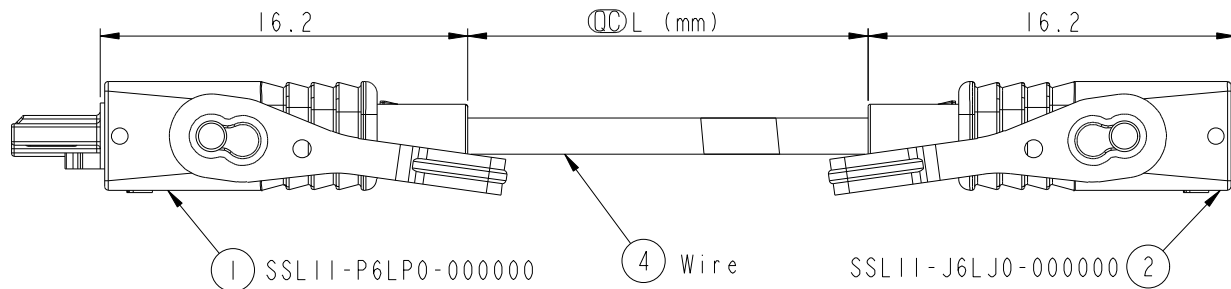

6	Blue	藍	6
5	Green	綠	5
4	Yellow	黃	4
3	Orange	橙	3
2	Red	紅	2
1	Brown	棕	1
Conn. 1	Wire Color		Conn. 2
Pin Out			

SSL11-P6LJP-D22AXX

01: L=100±20 mm.
 02: L=200±20 mm.
 04: L=400±25 mm.
 99: L=9900±5% mm
 Wire Length Range(L): 100~9900mm

22: 22AWG

LOCK&LATCH OPTION
 D: TWO W2B LOCK

Notes:

- * \varnothing Important Dimensions To Check.
- * Housing: Thermoplastic, UL94V-0, Natural White.
- * Terminal: Copper Alloy, Gold Plated.
- * Hood: Thermoplastic, UL94V-0, Natural White.
- * SR Mold: PP, UL94V-0, Natural White.
- * W2B Lock: Thermoplastic, UL94V-0, Natural White.
- * Wire: UL1430 22AWG, Brown/Red/Orange/Yellow/Green/Blue.
- * Wire Length Tolerance: ±5%mm.

UNIT:mm		
TOLERANCE		
±0.5 mm		

TITLE SSL11 WIRE ASS'Y, TWO W2B LOCK 6-POS, PLUG TO JACK			
SCALE 3:1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.1	\varnothing : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Fisher_Wang	DATE 2014-02-12
DWG NO SSL11-P6LJP-D22AXX	CHECKED BY Ivan_Lin	DATE 2014-02-12
CUSTOMER ALTW	APPROVED BY Kevin_Hu	DATE 2014-02-12