



REV. A	ECN NO.	DATE	SIGN	DESCRIPTION
A		2019/09/10	NianPing Yu	Rev. 01 to Rev. A
B	C191689	2019/10/09	NianPing Yu	△X6
C	C240236	2024/03/08	Vicky	△X3

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

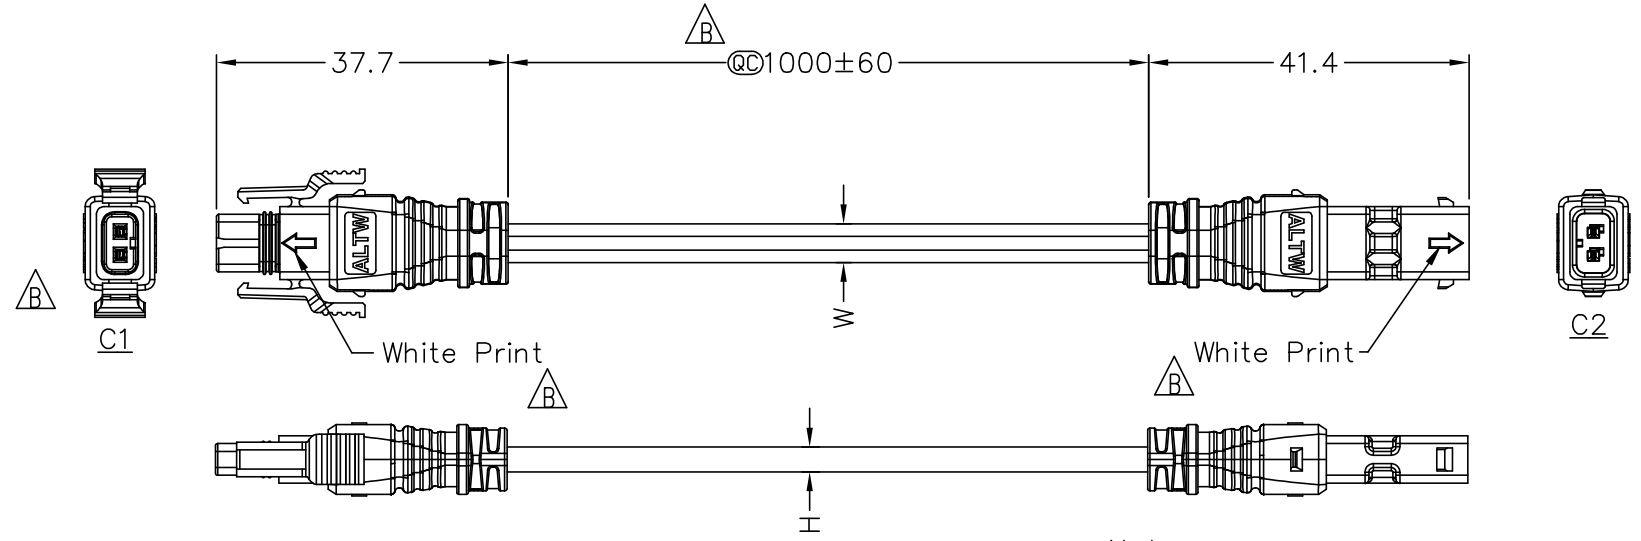

- Note:**
- * △B @@ Important Dimension To Check.
 - * C1
 - IP: IP68(1M/24Hr)
 - Housing: Thermoplastic, UL94V-0
 - * △C Terminal: Copper Alloy, Gold Plated
Gasket: Rubber
Seals: Rubber
 - * C2
 - IP: IP68(1M/24Hr)
 - Housing: Thermoplastic, UL94V-0
 - * △C Terminal: Copper Alloy, Gold Plated
Seals: Rubber
 - * Other
 - Cable: UL21996, Flat Cable, 18AWG(W=5.3, H=3.4)
 - UV Resistant, Black
 - Temperature range: -40~+105°C
 - Current Rating: 5A
 - Voltage Rating: 300V DC/AC

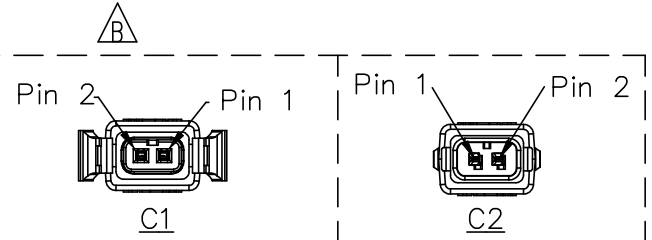

2	Red	紅	2
1	Brown	棕	1
C1	Wire Color		C2
Pin Out			

UNIT: mm		TITLE	SSL, 1.2 WP, NONE, 2P
TOLERANCE	±0.5 mm	SCALE	Free
REV. C	SIZE A4	SHEET	1 OF 1
		◎	Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	SSL12-D2LJP-L18H01	DRAWN BY	Vicky	DATE	2024/03/08
DWG NO	SSL12-D2LJP-L18H01	CHECKED BY	Rita	DATE	2024/03/08
CUSTOMER	ALTW	APPROVED BY	Fred	DATE	2024/03/08