


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/07/21	Cynthia	Change Ver.01 to Ver.A

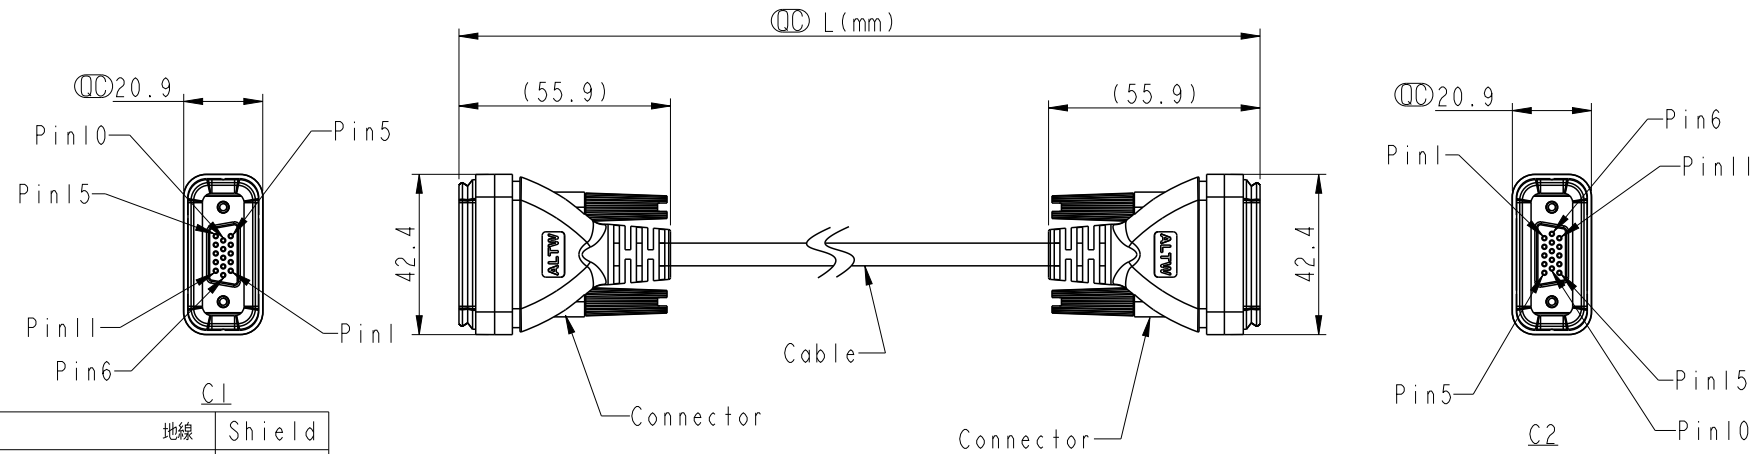

HDB 15 F L - HDB F L - S A XXX

XXX: 0.5~99Meters
 A05: 0.5 Meter
 001: 01 Meter
 002: 02 Meters
 .
 099: 99 Meters

- Note:
- * \varnothing Important Dimension
 - * Waterproof Rate: IP67
 - * Connector: HD-Sub 15 Pin, Female
 - * Housing: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Screw: Metal.
 - * Cable: UL2464 26AWG*15C+D+AL/My, PVC Jacket(UV Resistant)OD=6.5mm, Black
 - * Cable Length Tolerance: 0.5M: +60/-0mm
 01M: +60/-0mm
 02~03M: +120/-0mm
 04~05M: +160/-0mm
 06~10M: ±100mm
 11~20M: ±200mm
 21~30M: ±300mm
 31~99M: ±500mm

Shield	Drain	地線	Shield
15	Red/White	紅/白	15
14	Brown/White	棕/白	14
13	Black/White	黑/白	13
12	Light Green	淺綠	12
11	Purple	紫	11
10	Orange	橘	10
9	Black	黑	9
8	Red	紅	8
7	Pink	粉紅	7
6	Gray	灰	6
5	Yellow	黃	5
4	Green	綠	4
3	White	白	3
2	Blue	藍	2
1	Brown	棕	1
C1	Wire Color		C2

Pin Out

UNIT:mm TOLERANCE ±0.5 mm		TITLE ACC, DB, HDSUB, DB-ENDED FF, 1515		<h1 style="text-align: center;">Amphenol LTW</h1> <p style="text-align: center;">安費諾亮泰企業股份有限公司</p>	ITEM NO	DRAWN BY Cynthia	DATE 2020/07/21		
		SCALE 1:2	SIZE A4		SHEET 1	OF 1	DWG NO HDB15FL-HDBFL-SAXXX	CHECKED BY Wen	DATE 2020/07/21
		REV. A	WC-REV. A.5		\varnothing : Inspection item		CUSTOMER ALTW	APPROVED BY Neo	DATE 2020/07/21