




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1650092~095	2016/05/04	Ruru	Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

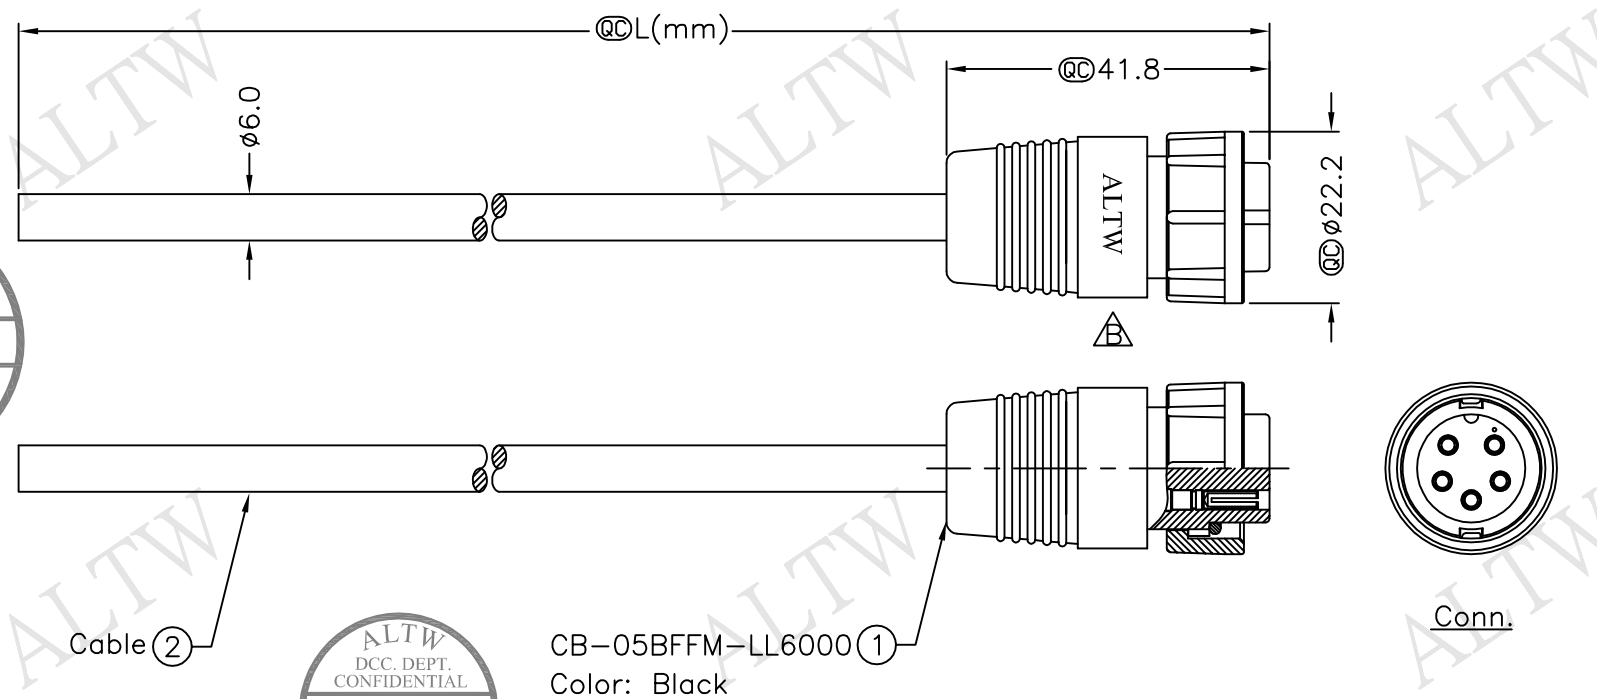


CB-05BFFM-LL6000 ①
Color: Black

CB-05BFFM-LL6AXX

- XX :01~99Meters
- 01 :01Meter
- 02 :02Meters
- ⋮
- 99 :99Meters

Cable Length(L):01~99Meters

- Note:
- * @D Important Dimensions To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 20#*5C+D+Al/My Black, PVC Jacket UV Resistant, OD=6.0
 - △ * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm



Pin Assignments
Front View

5	Green
4	White
3	Black
2	Blue
1	Brown
Conn.	Wire Color
Pin Out	

UNIT:mm	
TOLERANCE ±0.5 mm	

TITLE Middle,Cable Lock 5Pin F Conn F Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
QC :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO CB-05BFFM-LL6AXX
CUSTOMER ALTW	

DRAWN BY Ruru	DATE 2016/05/04
CHECKED BY Rita	DATE 2016/05/04
APPROVED BY Lisa	DATE 2016/05/04