


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1650100~103	2016/05/04	Ruru	Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

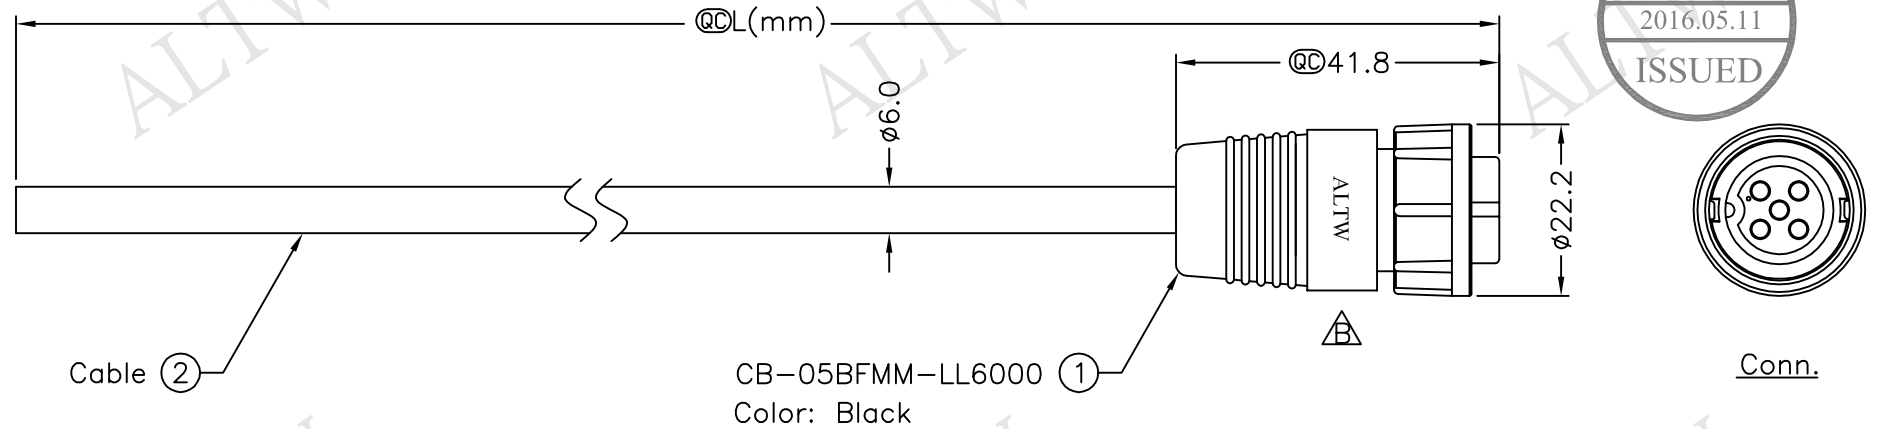

5	Green
4	White
3	Black
2	Blue
1	Brown
Conn.	Wire Color
	Pin Out

CB-05BFMM-LL6AXX  
 XX:01~99Meters  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters

- Notes:
- \* @C Important Dimension To Check.
  - \* Waterproof Rate: IP66
  - \* Connector: Black, Nylon+GF
  - \* Pin: Copper Alloy, Gold Plated
  - \* Ring: Black, EPDM
  - \* Nut: Black, Nylon+GF
  - \* Cable: UL2464 20AWG\*5C+Drain+Al/My Black, PVC Jacket UV Resistant, OD=6.0mm
  - \* Cable Length Tolerance: 01M: ±40mm  
 02M~05M: ±60mm  
 06M~10M: ±100mm  
 11M~30M: ±200mm  
 31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Middle Cable Lock 5Pin F Conn M Pin	
SCALE	Free	SHEET 1 OF 1
REV. B	SIZE A4	@C :Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2016/05/04
DWG NO CB-05BFMM-LL6AXX	CHECKED BY Rita	DATE 2016/05/04
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/05/04