


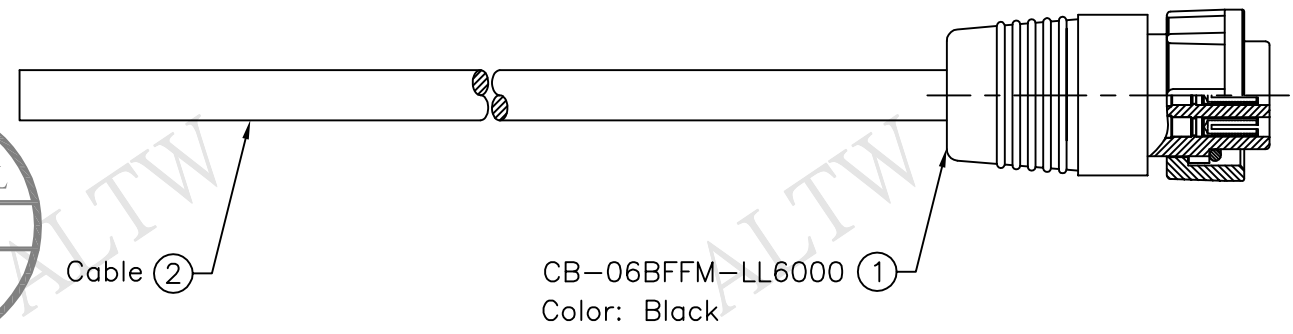




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1650108~111	2016/05/04	Ruru	Change Logo & Note

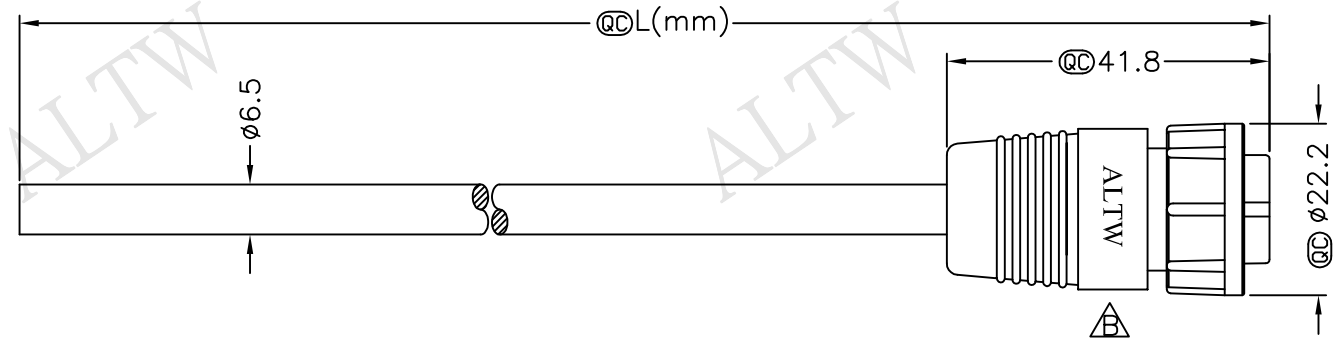

Pin Assignments  
Front View

6	Grey
5	Yellow
4	Green
3	White
2	Blue
1	Brown
Conn.	Wire Color
Pin Out	

CB-06BFFM-LL6AXX

- XX :01~99Meters
- 01 :01Meter
- 02 :02Meters
- ⋮
- ⋮
- 99 :99Meters

Cable Length(L):01~99Meters

Note:

- \* @C Important Dimensions To Check.
- \* Waterproof Rate: IP66
- \* Housing: Nylon+GF, Black
- \* Female Pin: Copper Alloy, Gold Plated
- \* Cable: UL2464 20#\*6C+D+Al/My  
Black, PVC Jacket UV Resistant, OD=6.5
- △\* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm  
06M~10M: ±100mm  
11M~30M: ±200mm  
31M~99M: ±500mm

UNIT:mm		TITLE Middle,Cable Lock 6Pin F Conn F Pin	<b>Amphenol LTW</b>		ITEM NO	DRAWN BY Ruru	DATE 2016/05/04
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1	<b>安費諾亮泰企業股份有限公司</b>		DWG NO CB-06BFFM-LL6AXX	CHECKED BY Rita	DATE 2016/05/04
REV. B	SIZE A4	QC :Inspection Item			CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/05/04

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.