
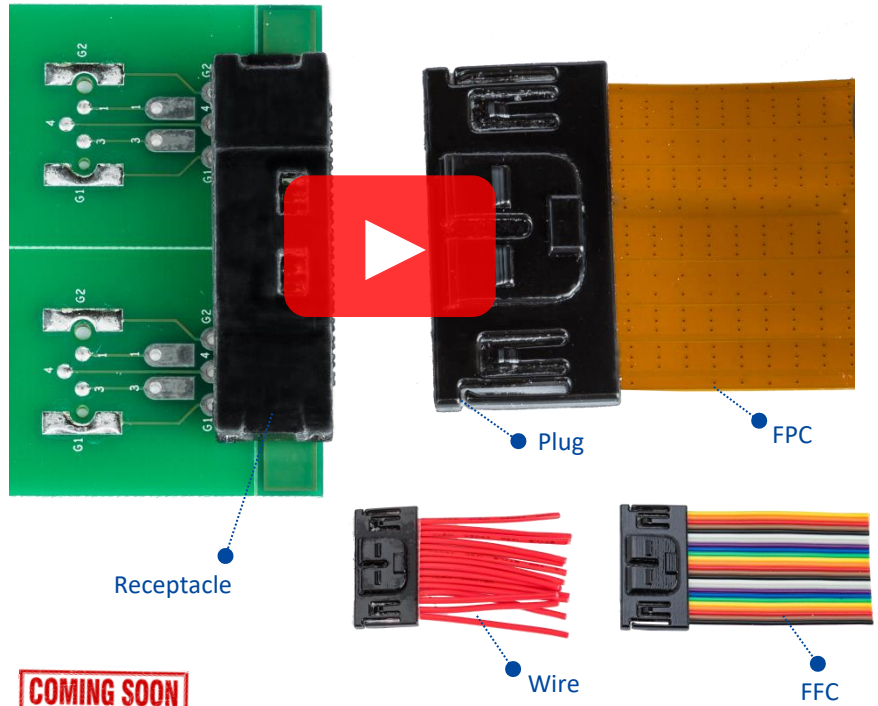


ZConnect®

FFC / FPC Connectors

Anti-vibration, Blind Mate, Audible Feedback

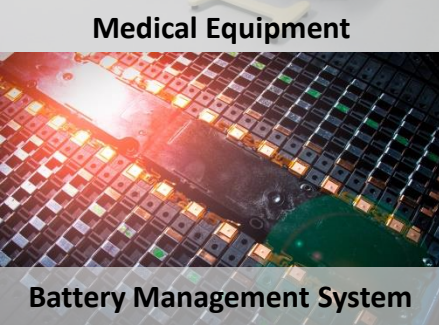

Key Features

- Anti-Vibration
- Cost and Space Saving
- Low Profile (mated 8.0 mm Max.)
- Audible Feedback
- Improved Assembly Efficiency
- Multiple Contacts
- Wire-to-Board Vertical Type

General Characteristics

- Automotive Compliant
- Pitch: 0.9 mm
- Contacts: 8 ~ 40
- Operating Temperature: -40°C ~ 125°C
- Operating Voltage: 120V DC
- Current Rating: 1A

Assembly Instruction

