


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION

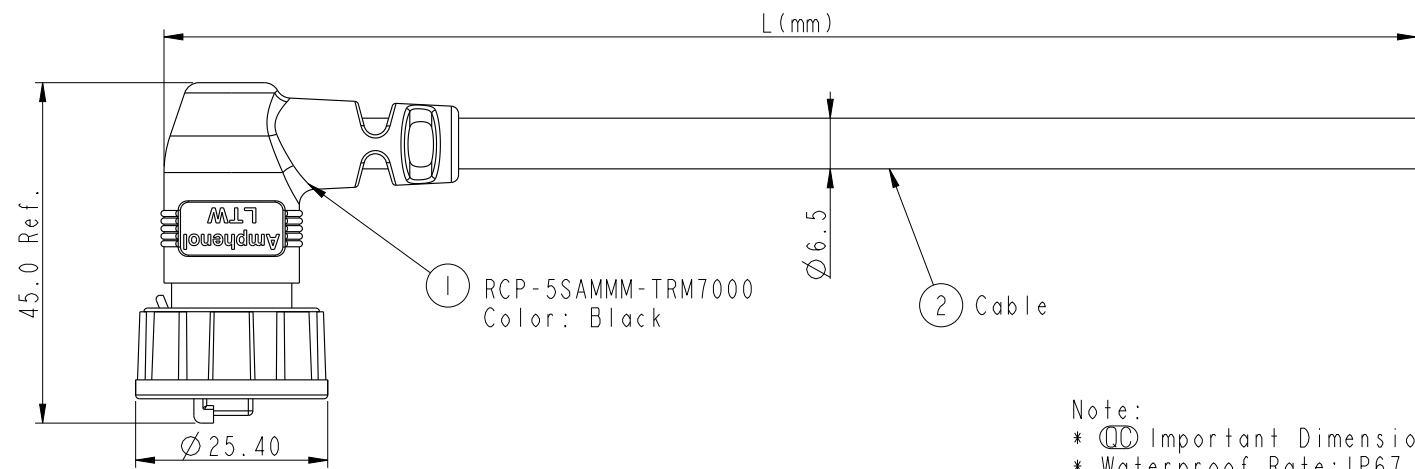

① RCP-5SAMMM-TRM7000
Color: Black

② Cable



- Note:
- * \varnothing Important Dimension
 - * Waterproof Rate: IP67.
 - * Plug: PC, UL94V-2, Gold Plated, Shielded
 - * Lock Nut: Nylon+GF, Black.
 - * Gasket: EPDM, Black.
 - * Cable: (B)CAT5E FTP, OD Max.: \varnothing 6.5, Black.
 - * Cable Length Tolerance:
 - 01M: \pm 40mm
 - 02~05M: \pm 60mm
 - 06~10M: \pm 100mm
 - 11~30M: \pm 200mm
 - 30~99M: \pm 500mm

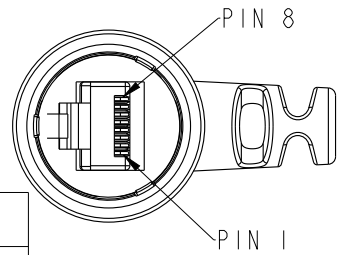

RCP-5SAMMM-TRM7BXX

XX: 01~99Meter
01: 01Meter
02: 02Meters
:
:
99: 99Meters
Cable Length(L):01~99Meters

(B)CAT5E FTP



Pin Out

Wire Color	Plug	Shield
Drain Wire	接地	Shield
Brown	棕	8
Brown/white	棕白	7
Green	綠	6
Blue/white	藍白	5
Blue	藍	4
Green/white	綠白	3
Orange	橙	2
Orange/white	橙白	1

Twist 對絞
Twist 對絞
Twist 對絞

UNIT:mm		
TOLERANCE		
.X	\pm 0.25	
.XX	\pm 0.1	
.XXX	\pm 0.05	
ANGLES	\pm 1°	

TITLE RJ45,C SIZE,RIGHT ANGLE CABLE 3P_LOCK 5E M CONN M PIN			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.7	\varnothing : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Laurence_zang	DATE 2013-04-20
DWG NO RCP-5SAMMM-TRM7BXX	CHECKED BY RAISON	DATE 2013-04-20
CUSTOMER ALTW	APPROVED BY VICTOR	DATE 2013-04-20