


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1660193~196	2016/05/30	Ruru	Change Logo & Note

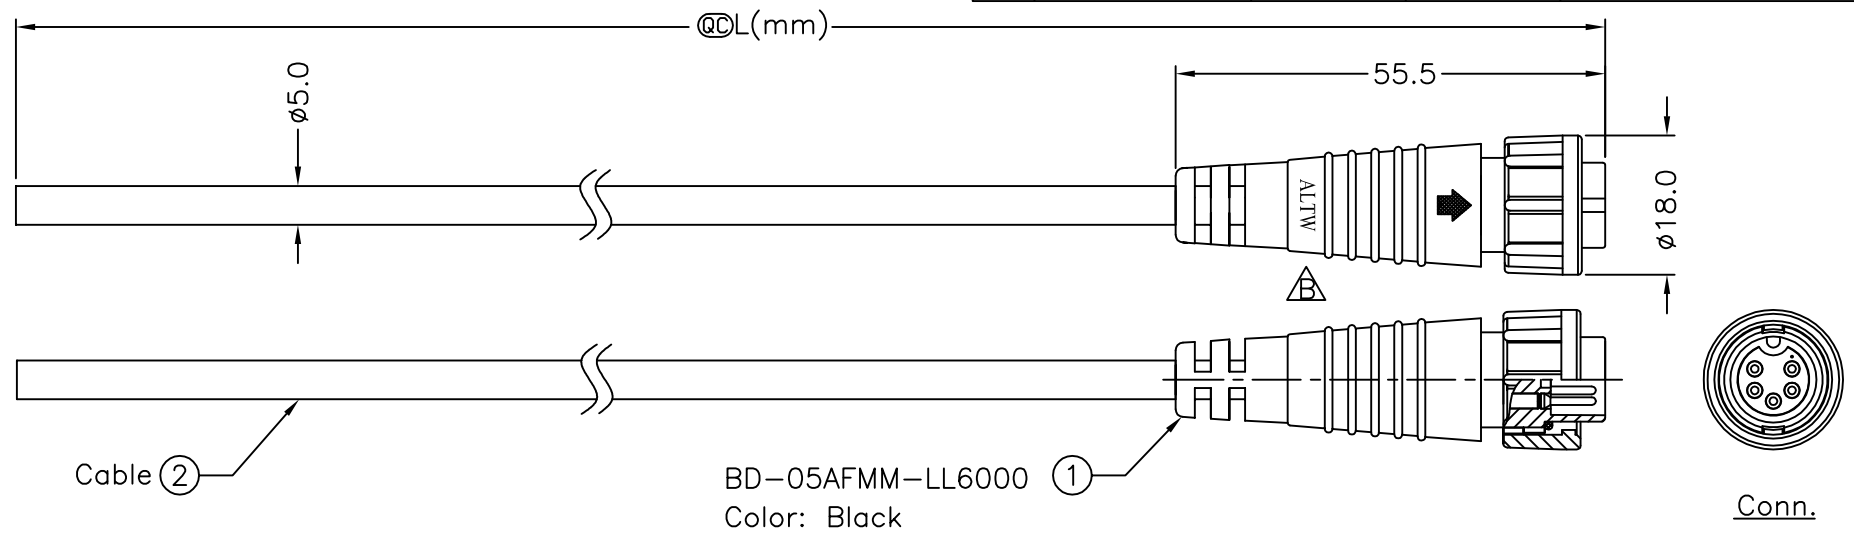



Cable ②

BD-05AFMM-LL6000  
Color: Black

BD-05AFMM-LL6AXX

↑  
XX:01~99Meter  
01:01Meter  
02:02Meters  
:  
:  
99:99Meters

Cable Length(L):01~99Meters

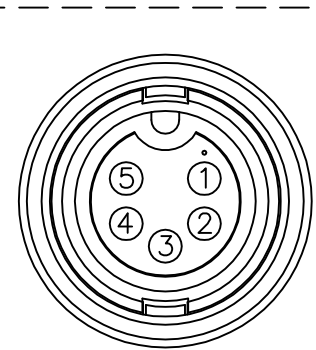

Pin Assignments  
Front View

5	Green
4	White
3	Black
2	Blue
1	Brown
Conn.	Wire Color
Pin Out	

- Note:
- \* @DL Important Dimension To Check.
  - \* Waterproof Rate: IP66
  - \* Housing: Nylon+GF, Black
  - \* Pin: Copper Alloy, Gold Plated
  - \* Cable: UL2464 24AWG\*5C+D+Al/My, (UV Resistant) OD=5.0, Black
  - \* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm  
06M~10M: ±100mm  
11M~30M: ±200mm  
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Standard, Cable Lock 5Pin F Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
QC : Inspection Item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru
DWG NO BD-05AFMM-LL6AXX	CHECKED BY Rita
CUSTOMER ALTW	APPROVED BY Lisa

DATE 2016/05/30
DATE 2016/05/30
DATE 2016/05/30

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.