


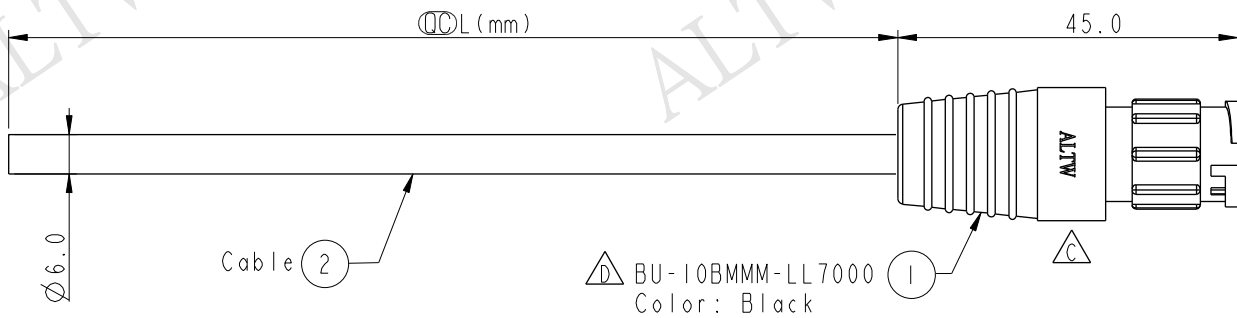


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31180043 ~046	2011/08/12	Jiang Jun Hua	Change Drawings
C	LENI590395~98	2015/09/11	Ruru	Change Logo
D	LE315C0382~385	2015/12/11	Ruru	Change Ball-marker & Tolerance



△ BU-10BMMM-LL7000  
Color: Black




△ BU-10BMMM-LL7AXX

XX: 01~99Meter  
01: 01Meter  
02: 02Meters  
:  
:  
99: 99Meters

Cable Length(L): 01~99Meters

Note:

- \* Ⓞ Important Dimension To Check.
- \* Waterproof Rate: IP67
- △\* Housing: Nylon+GF, Black
- △\* Pin: Copper Alloy, Gold Plated
- △\* Cable: UL2464 26AWG\*10C+Drain+Al/My, PVC Jacket UV Resistant, OD=6.0, Black
- △\* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm  
06M~10M: ±100mm  
11M~30M: ±200mm  
31M~99M: ±500mm



PIN ASSIGNMENTS  
Front View 前視圖

Orange	橙	10
Black	黑	9
Red	紅	8
Pink	粉紅	7
Gray	灰	6
Yellow	黃	5
Green	綠	4
White	白	3
Blue	藍	2
Brown	棕	1
Wire Color	Conn.	
Pin Out		

UNIT: mm	
TOLERANCE	± 0.5mm △

TITLE	STANDARD CABLE LOCK 10PIN M CONN M PIN		
SCALE	1:1	SIZE	A4
REV.	D	WC-REV.	A.2
		QC	QC: Inspection item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	BU-10BMMM-LL7AXX	Ruru 2015-12-11
CUSTOMER	ALTW	CHECKED BY
		Rtia 2015-12-11
		APPROVED BY
		Lisa 2015-12-11