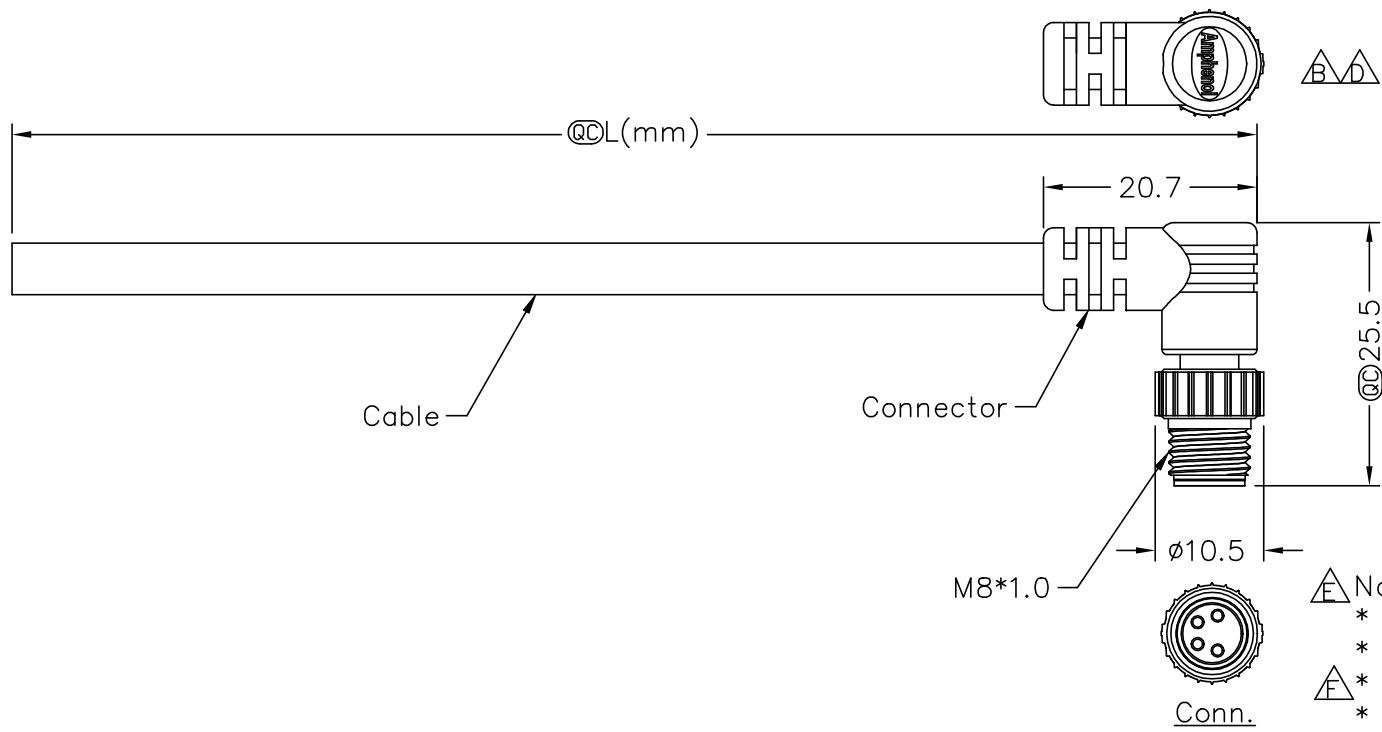


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN1630171~174	2016/03/07	Vicky	Update Logo
E	C210637	2021/05/03	Vicky	△X8
F	C221881	2022/12/07	Vicky	△X1



- △ Note:
- * RoHS Compliant
 - * @ Important dimension
 - △ * Waterproof rate: IP67, mated Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Metal
 - Outer mold: Thermoplastic, Black
 - * Cable: PU Jacket, Black
 - △ * Cable length tolerance:

1M: +50/-0 mm	3M: +100/-0 mm
1M < L ≤ 3M: +100/-0 mm	5M: +150/-0 mm
3M < L ≤ 5M: +150/-0 mm	10M: ±100 mm
5M < L ≤ 10M: ±100 mm	20M: ±200 mm
10M < L ≤ 20M: ±200 mm	30M: ±300 mm
20M < L ≤ 30M: ±300 mm	99M: ±500 mm
30M < L ≤ 99M: ±500 mm	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

UNIT: mm	TITLE O SEN, M8 CABLE W/SR, M, M, MOLDING		 Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY	DATE
TOLERANCE	SCALE	SHEET		DWG. NO	CHECKED BY	DATE
±0.5 mm	Free	1 OF 2		△ 8-XXAMMM-SR7BXX	Rita	2016/03/07
	REV. F	SIZE A4	@ : Inspection Item	CUSTOMER	APPROVED BY	DATE
				ALTW	Lisa	2016/03/07



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

4P	4.8	22	8-04AMMM-SR7BXX
3P	4.5		8-03AMMM-SR7BXX
△ Contacts	Cable OD	AWG	Item No.

△ 8-XXAMMM-SR7BXX

XX: No. Of Pin

↑
 XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 :
 99: 99Meters
 Cable Length(L): 01~99Meters

Pin Out	4	Black	黑	4	Black	黑
	3	Blue	藍	3	Blue	藍
	1	Brown	棕	2	White	白
				1	Brown	棕
	Pin #	Wire		Pin #	Wire	
Conn.						
	3P			4P		

△ Pin Assignments Front View

UNIT: mm	TITLE	
TOLERANCE ±0.5 mm	O SEN, M8	
	CABLE W/SR, M, M, MOLDING	
	SCALE Free	SHEET 2 OF 2
REV. F	SIZE A4	QC: Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2016/03/07
DWG. NO △ 8-XXAMMM-SR7BXX	CHECKED BY Rita	DATE 2016/03/07
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/03/07