


REV. B	ECN NO. LEN1720102~105	DATE 2017/02/09	SIGN Ruru	DESCRIPTION Change Logo & Outer Mold Design & Note
--------	------------------------	-----------------	-----------	--

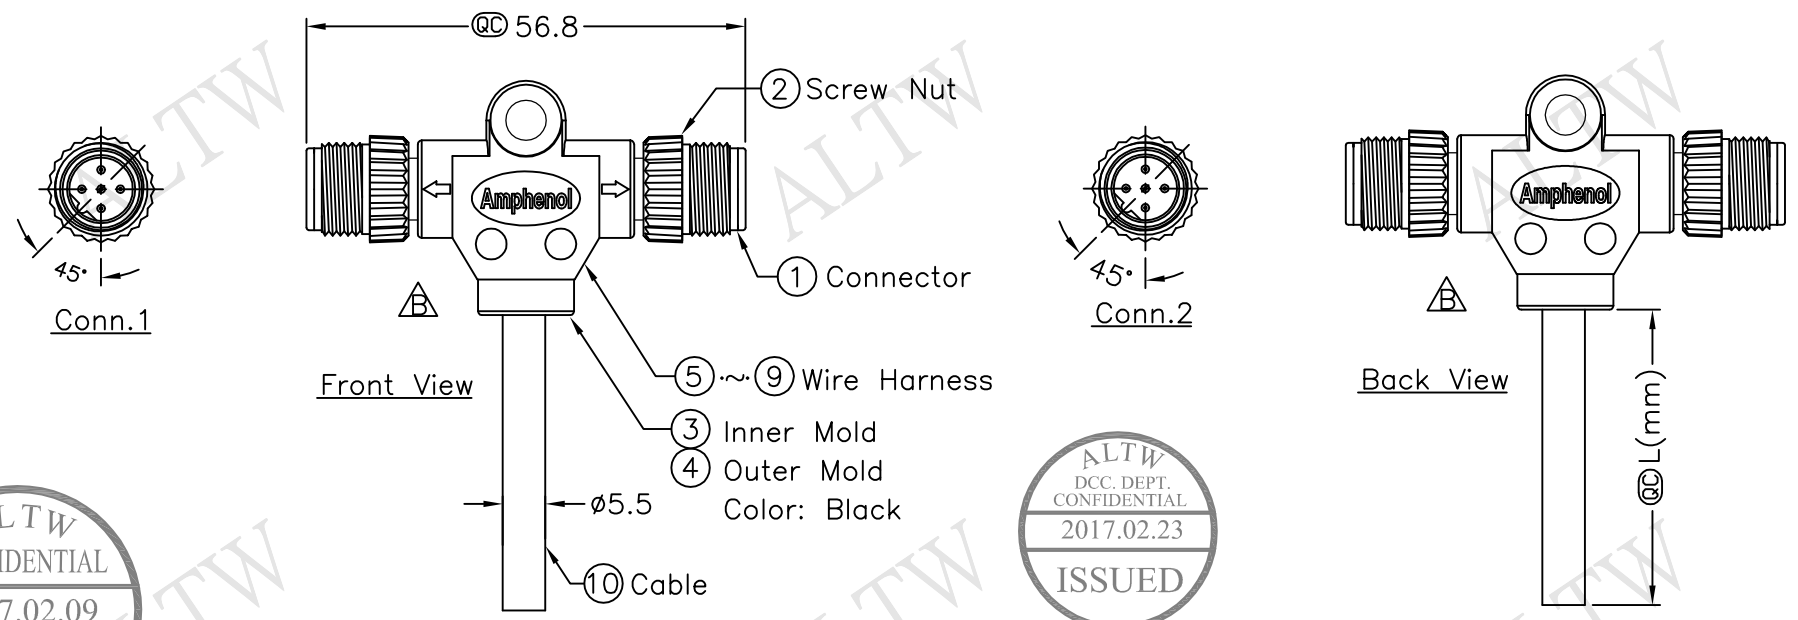


PB-050500-MM0-TSAXX

XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters

Cable Length(L):01~99Meters

- Note:
- * QC Important Dimension.
 - * Waterproof Rate: IP68
 - * Housing: Black, Polyurethane
 - * Screw Nut: Black, Nylon+GF
 - * Male Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007 24AWG, 5Pcs
 - * Cable: UL2464 22AWG*5C+TALCUM Black, PVC Jacket UV Resistant OD=5.5mm
 - * Cable Length Tolerance: 01M: ± 40 mm
 02M~05M: ± 60 mm
 06M~10M: ± 100 mm
 11M~30M: ± 200 mm
 31M~99M: ± 500 mm



Conn.1&2
Pin Assignments
Front View

5	Green	綠	5
4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

UNIT:mm	
TOLERANCE	± 0.5 mm

TITLE		M12P B Coded Conn	
T Cable Screw MM Conn MM Pin			
SCALE	Free	SHEET	1 OF 1
REV. B	SIZE A4	QC :Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	PB-050500-MM0-TSAXX
CUSTOMER	ALTW

DRAWN BY	Ruru	DATE	2017/02/09
CHECKED BY	Rita	DATE	2017/02/09
APPROVED BY	Max	DATE	2017/02/09

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.