



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LENI390115~18	2013/09/06	Rensong	Change dimension
C	LENI480526~529	2014/08/18	Sam	Change Logo

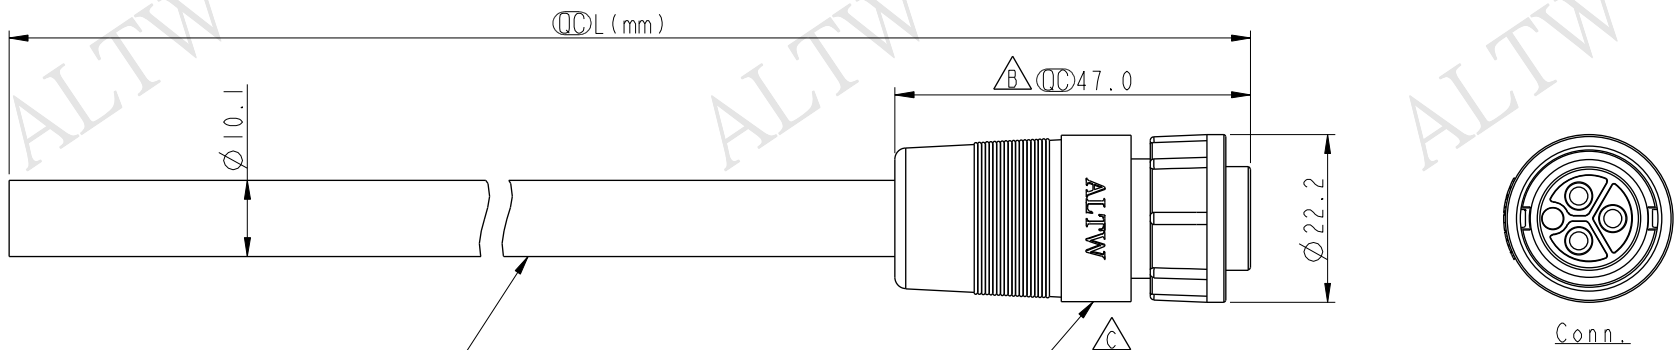

Cable ②


PWC-03BFMM-LL7100  
Color: Black

PWC-03BFMM-LL7EXX

- XX : 01~99Meters
- 01 : 01Meter
- 02 : 02Meters
- ...
- 99 : 99Meters

Cable Length(L): 01~99Meters

- Note:
- \* Ⓞ Important Dimension To Check.
  - \* Waterproof Rate: IP67
  - \* Connector: Nylon+GF, Black.
  - \* Male Pin: Copper Alloy, Gold Plated.
  - \* Lock Nut: Nylon+GF, Black.
  - \* Cable: VDE H05 2.5mm<sup>2</sup>\*3G, PVC Jacket, OD=10.1, Black.
  - \* Cable Length Tolerance: 01M: 40mm  
02M~05M: ±60mm  
06M~10M: ±100mm  
11M~30M: ±200mm  
31M~99M: ±500mm

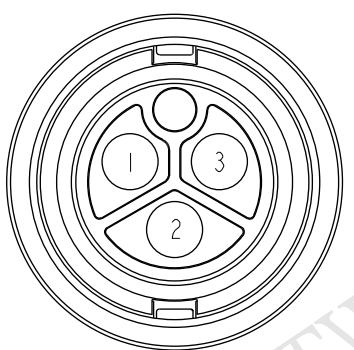

Pin Assignments  
Front View

3	Blue	藍
2	Black	黑
1	Brown	棕
Conn.	Wire Color	
Pin Out		

UNIT:mm		
TOLERANCE ±0.5mm		

TITLE POWER MOLDING F CONN. M PIN 20A			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. B.3	Ⓞ: Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Sam	DATE 2014-08-18
DWG NO PWC-03BFMM-LL7EXX	CHECKED BY Vicky	DATE 2014-08-18
CUSTOMER ALTW	APPROVED BY Rita	DATE 2014-08-18